


KV-2752ET / KV-2752EC / KV-2756EC

RM-634 RM-635 RM-635


AEP Model
Chassis No. SCC-522D-A

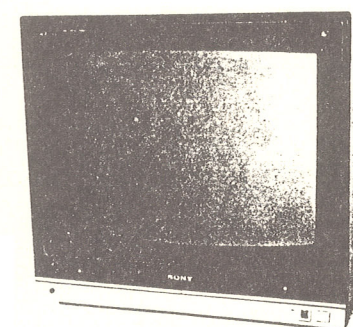

October, 1984

PE-3 CHASSIS

CIRCUIT BOARDS LOCATION

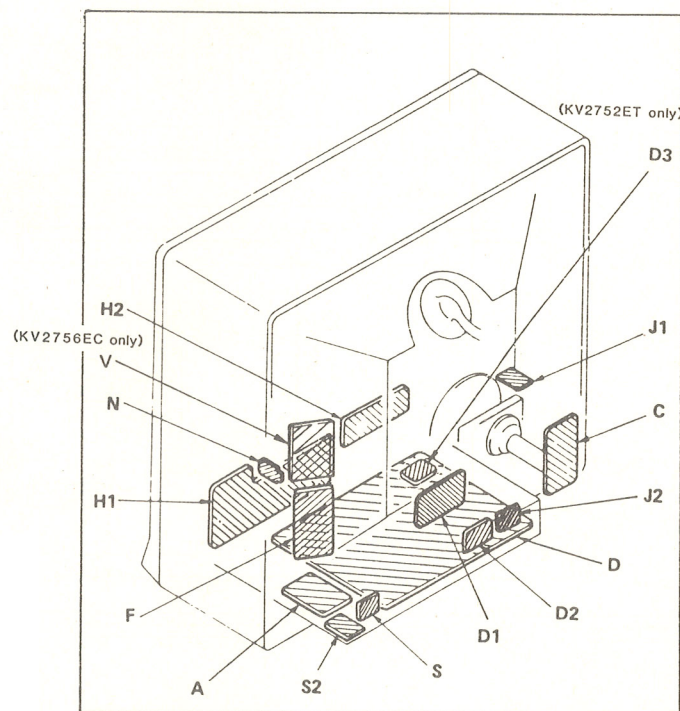



SPECIFICATIONS


Television system	CCIR system, B, G and H	Outputs	Audio output connector (5-pin DIN)
Color system	PAL		Recording output
Channel coverage	VHF channels E2 — U20 UHF channels E21 — E68		1 mVrms/kilohm
Programming system	30 programmes		Line output
	Automatic programing digital tuning		Variable, 0 — 2 Vrms (max.)
Picture tube	Approx. 68 cm (27 inches)		Impedance less than 1 kilohm
	114-degree deflection Trinitron system		External speaker terminals (2-pin DIN)
	(Approx. 64 cm screen measured diagonally)		For 8 — 16 ohm speakers
Antenna	75-ohm standard serial socket (DIN 45325/IEC 169-Z)	Power requirements	Headphones jack (stereo phone jack)
Speakers	Two speakers		220 — 240 V ac, 50 Hz
	Approx. 10 cm dia.	Power consumption	150 Wh
Audio output	5W+5W (with 10% harmonic distortion)	Dimensions	(Approx. 6Wh in standby condition)
Input	21-pin connector	Weight	Approx. 661 x 622 x 478 mm (w/h/d)
	in accordance with the requirements of CENELEC Standard	Accessory supplied	Approx. 50.5 kg
			Remoto commander RM635


KV2752/56EC/2752ET

BLOCK DIAGRAM


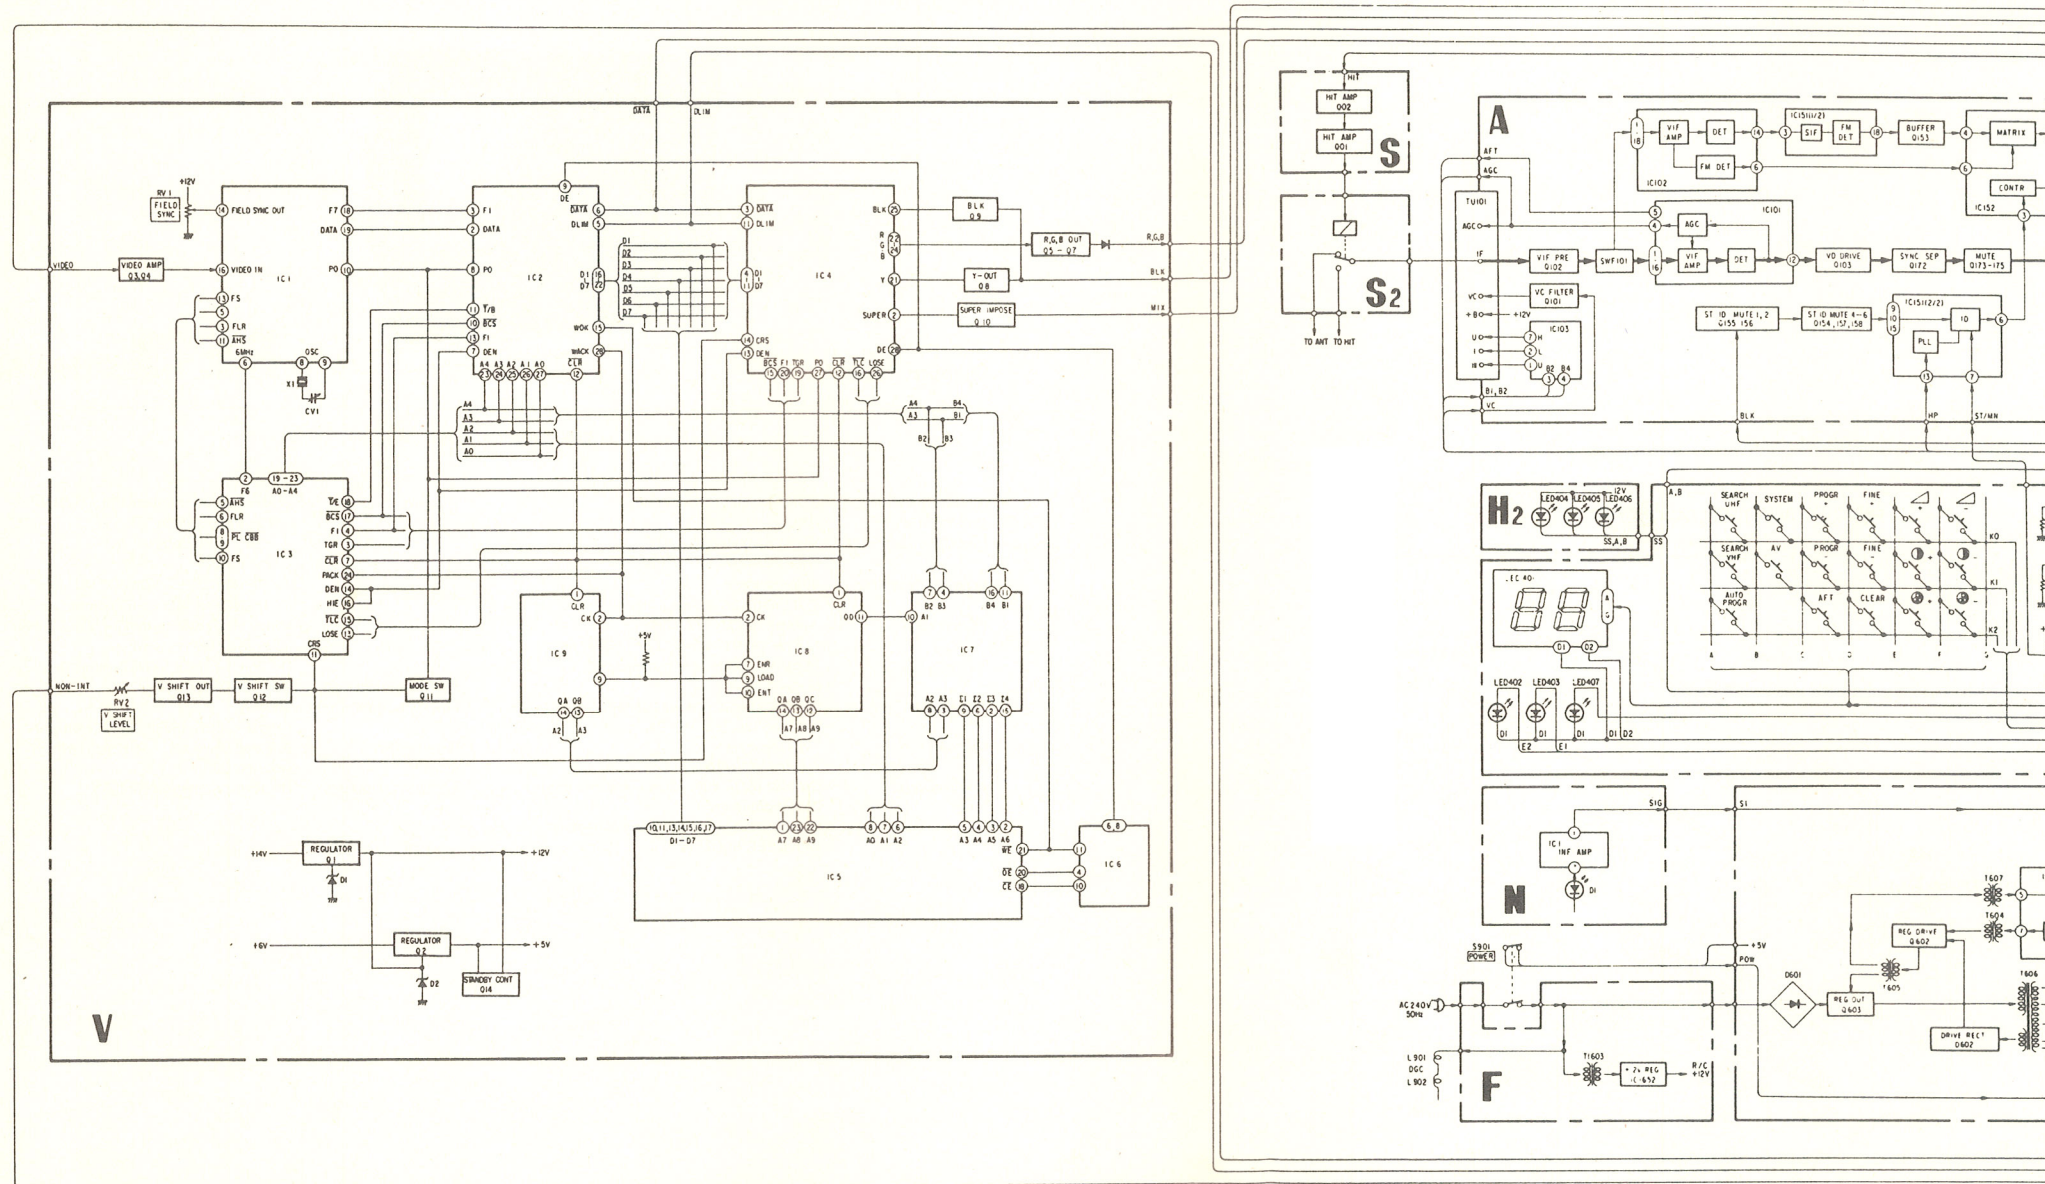


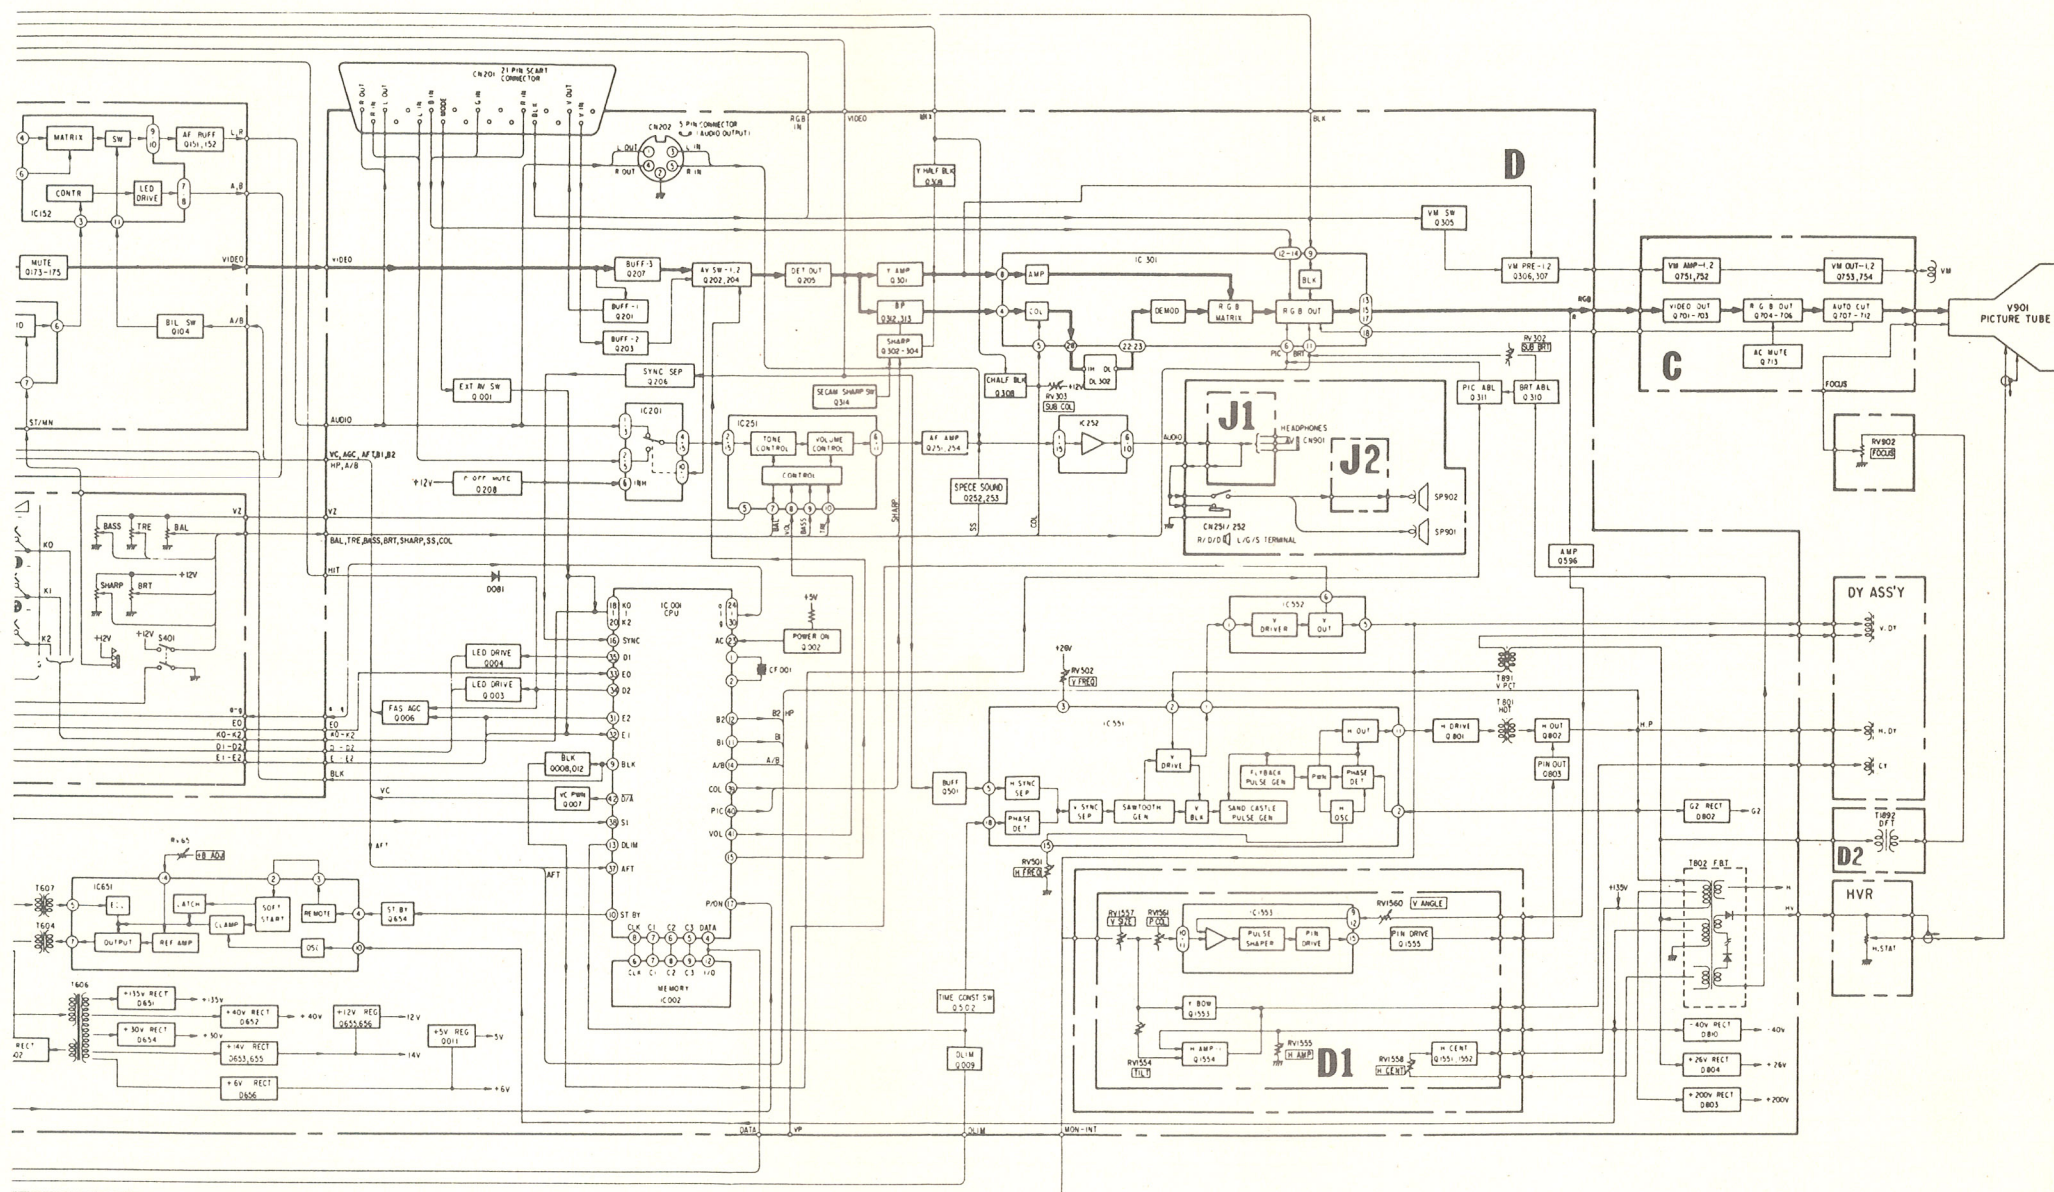

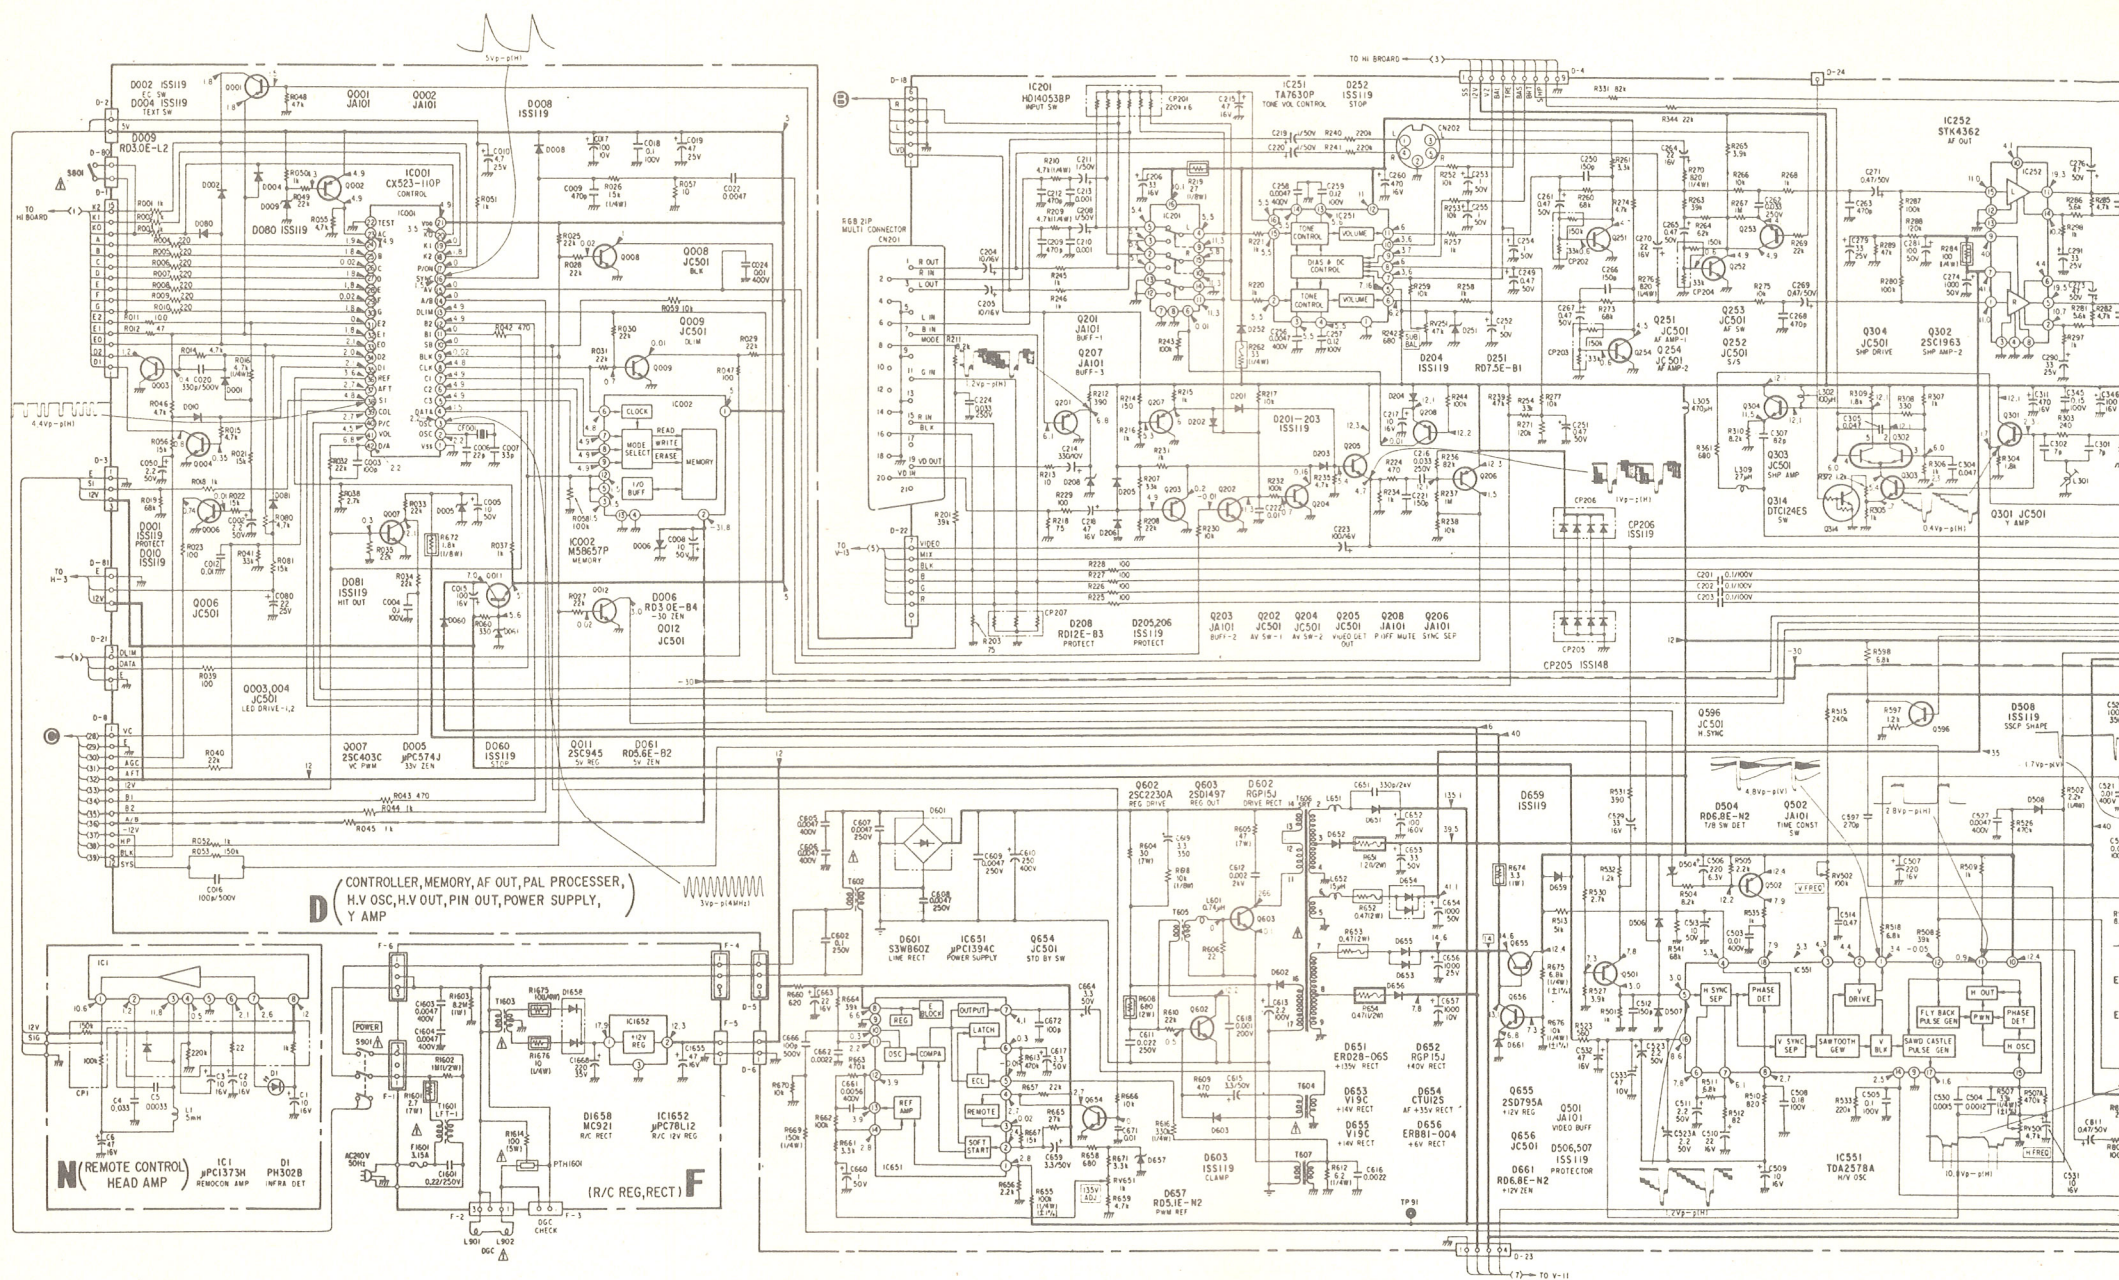


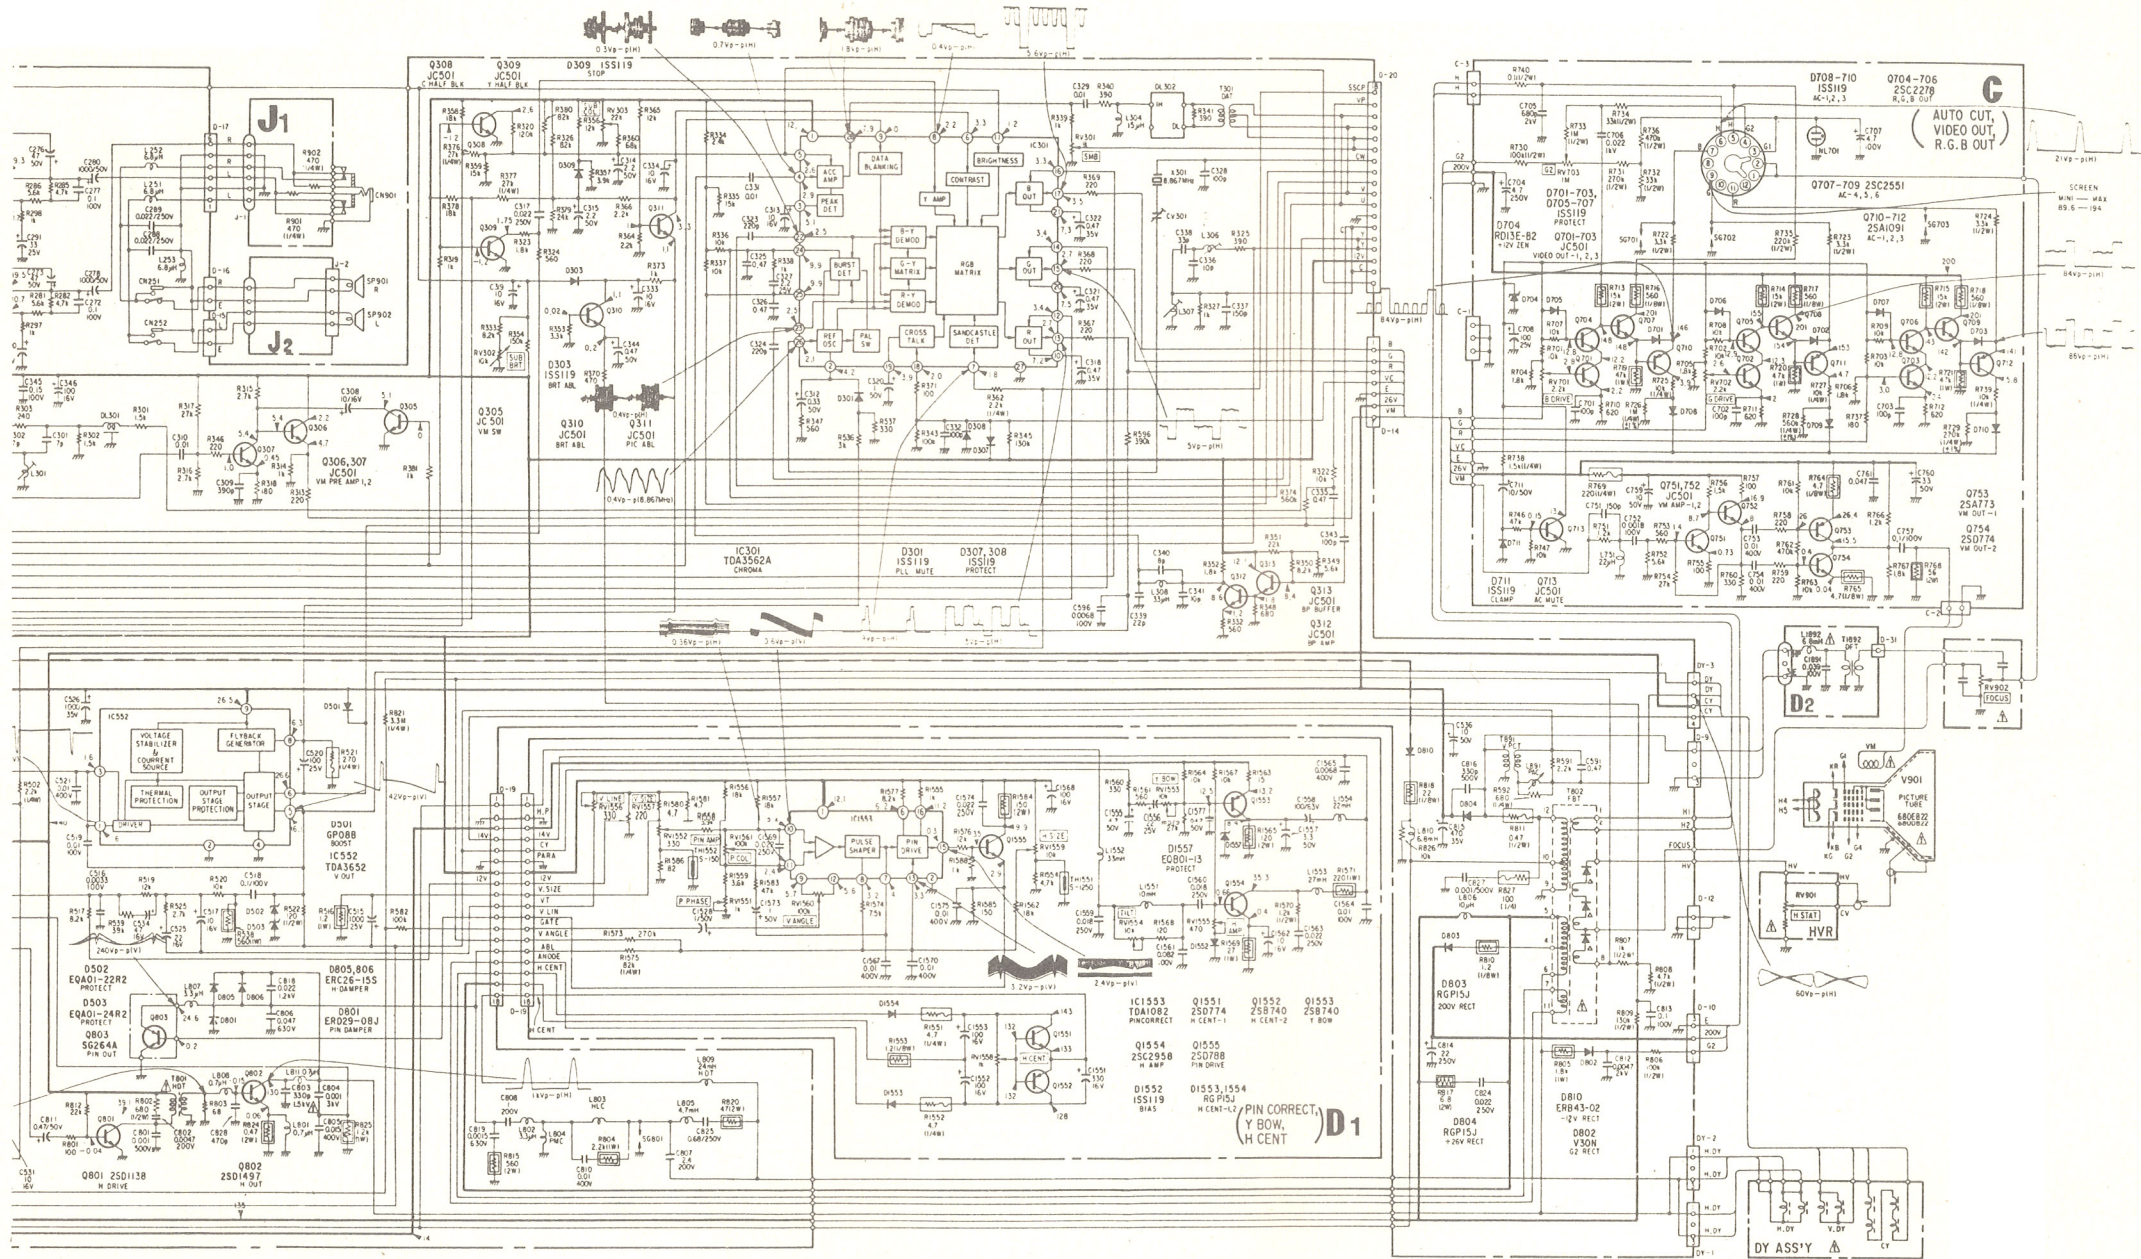

only)

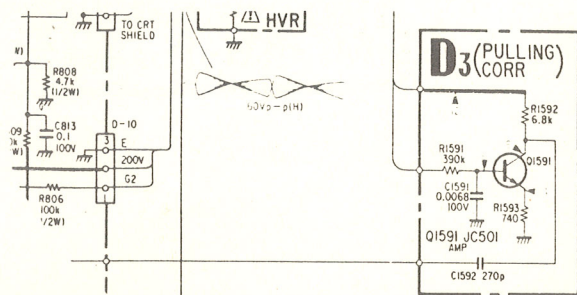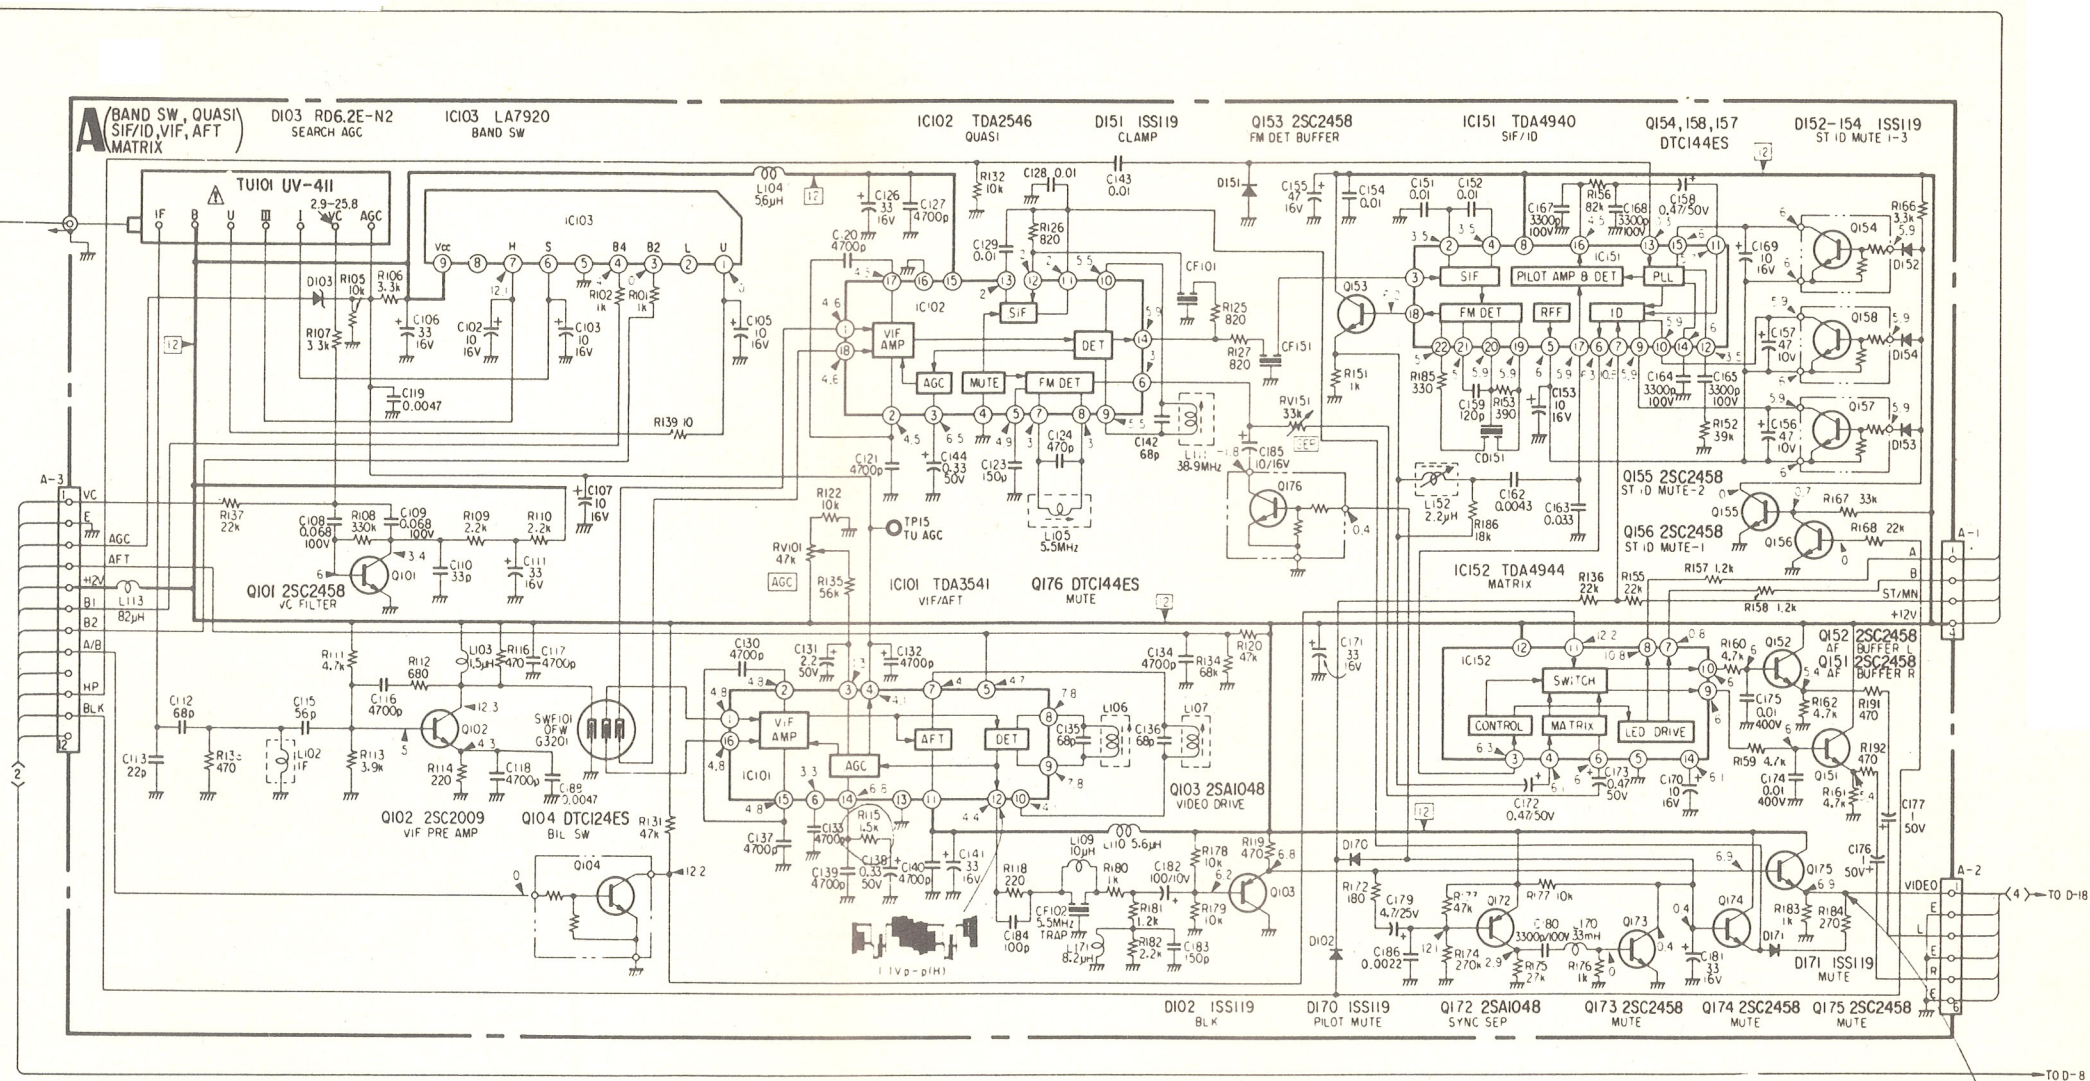


(KV2752ET only)




Q IC	104	101	IC103	102	IC102	153	IC151	156,155,154	Q IC
D	103	101	151		IC101	176 173	IC152 172	157,158 175,151,152	D
ADJ							RV151		ADJ
TP		15							TP


(KV2752ET only)

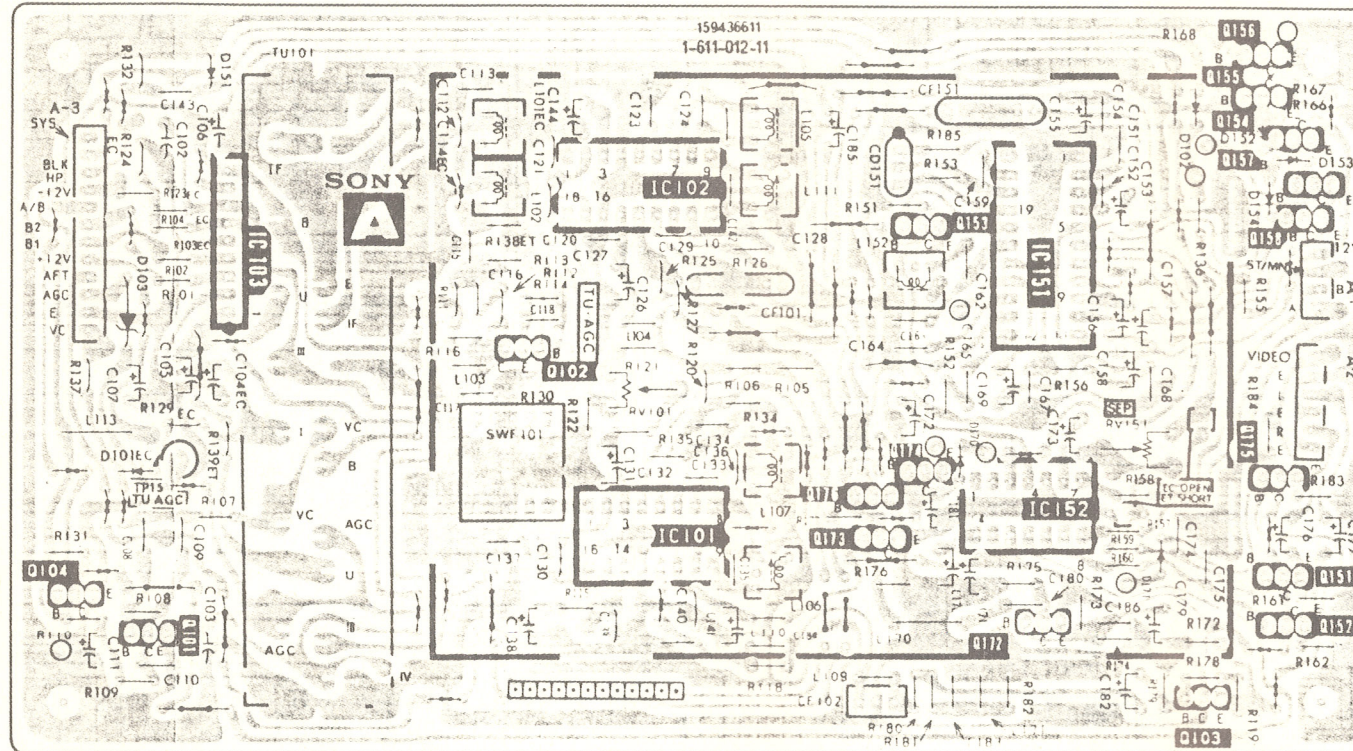


(KV2752ET only)

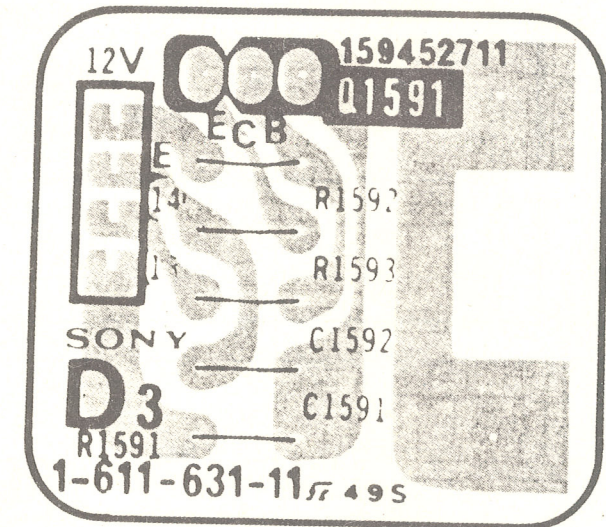


— D1 board —

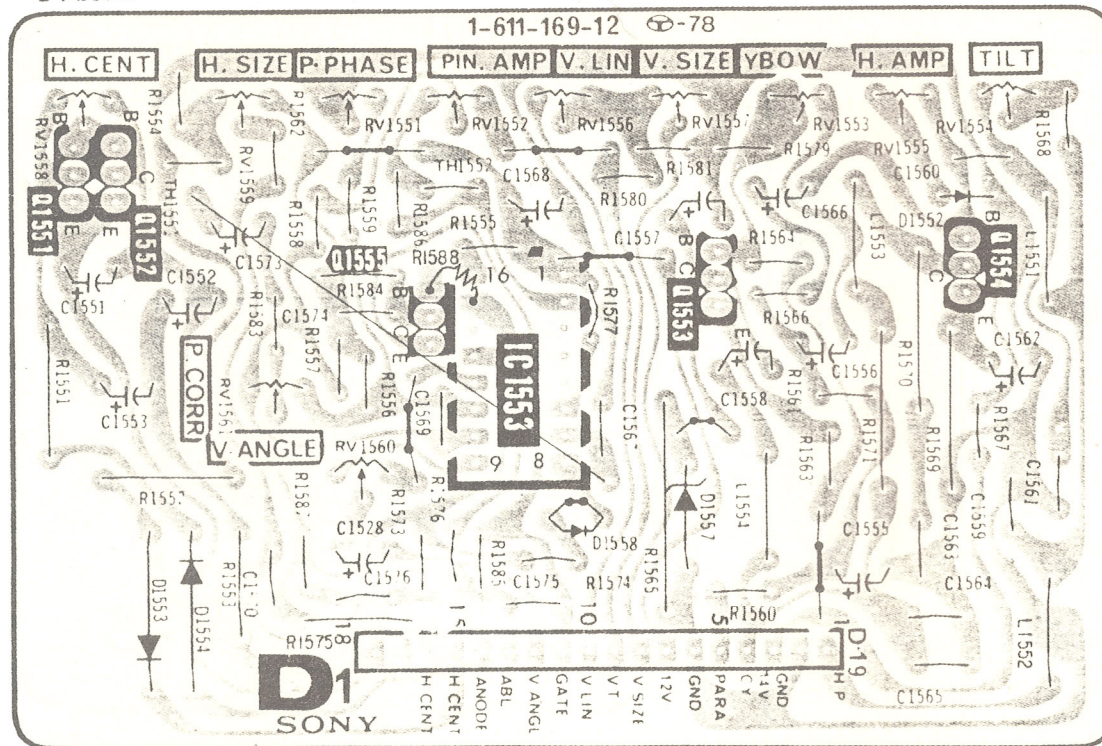


— C board —

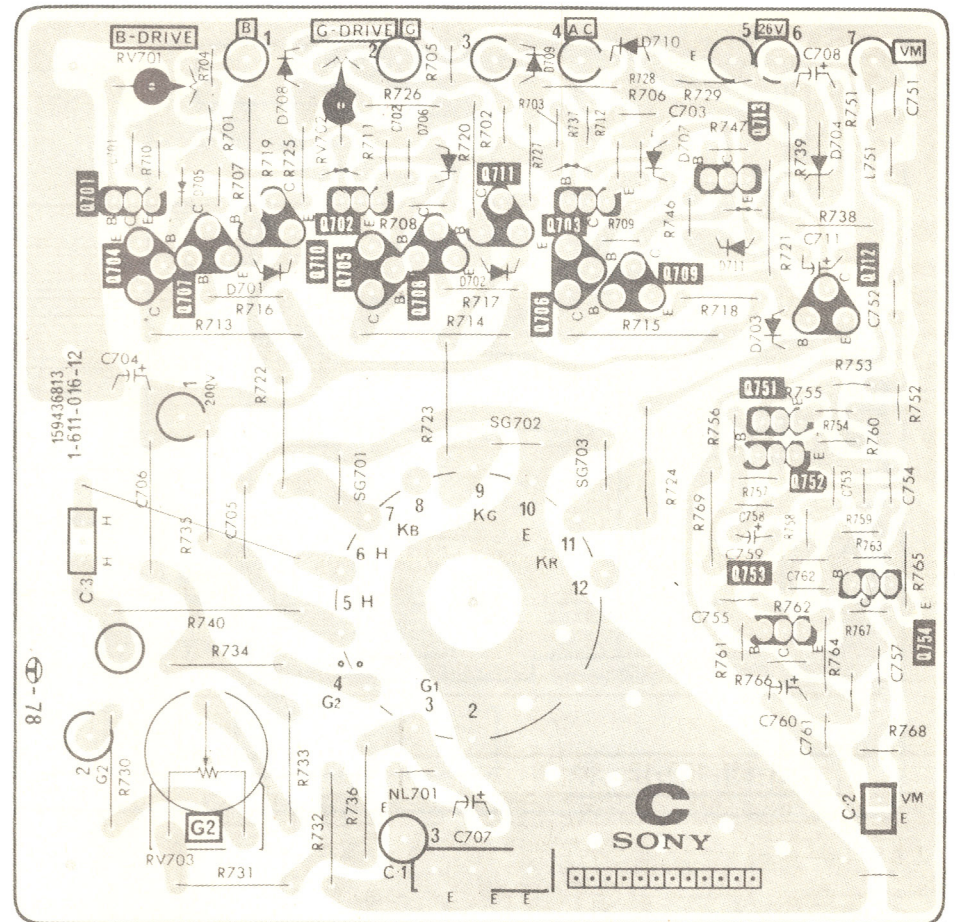


— H2 board —

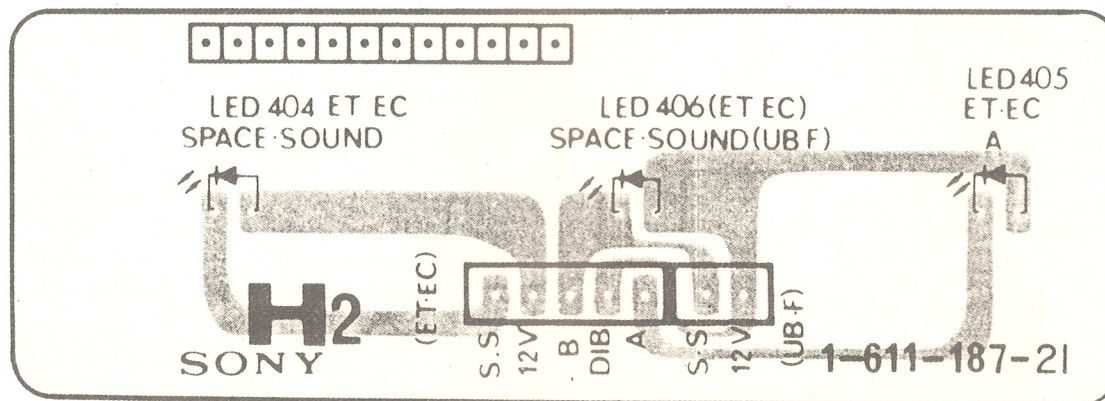


— F board —

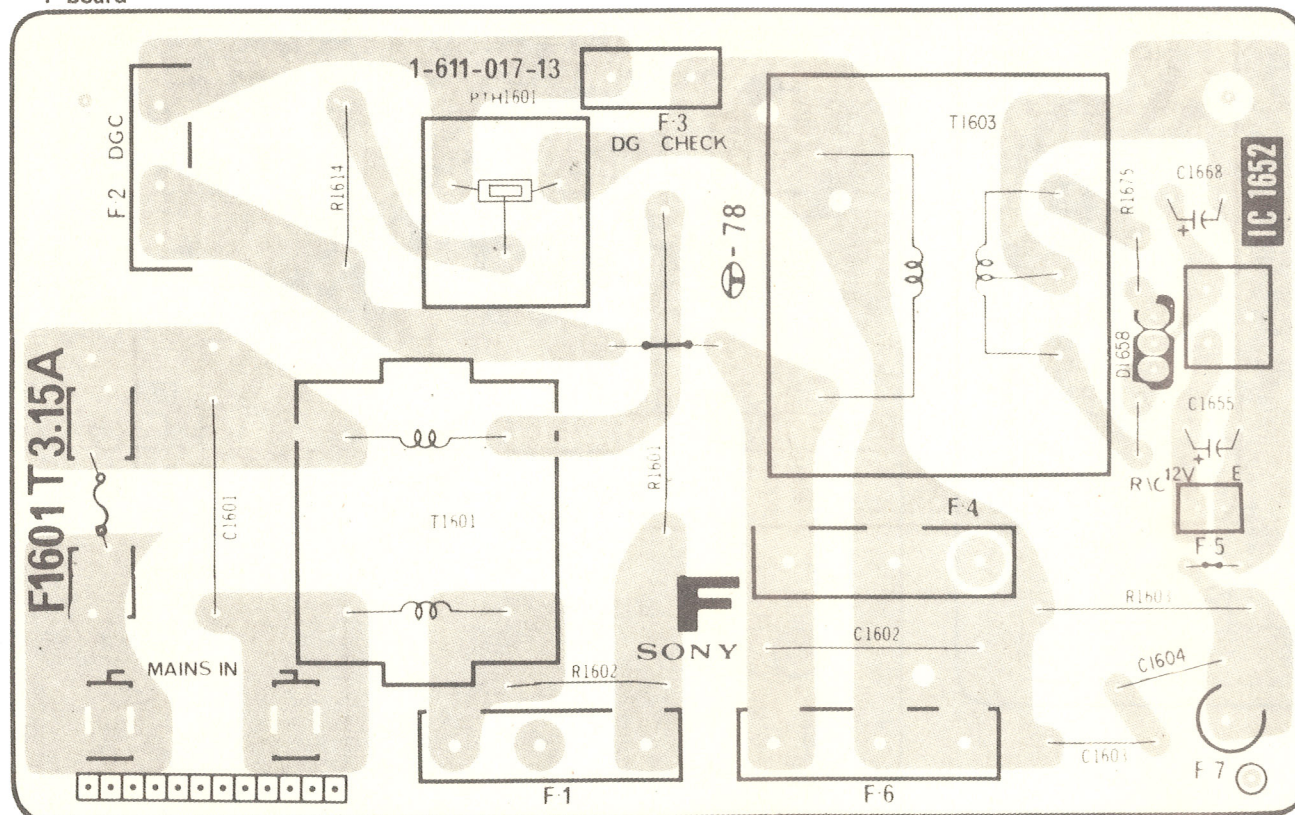


— S2 board —

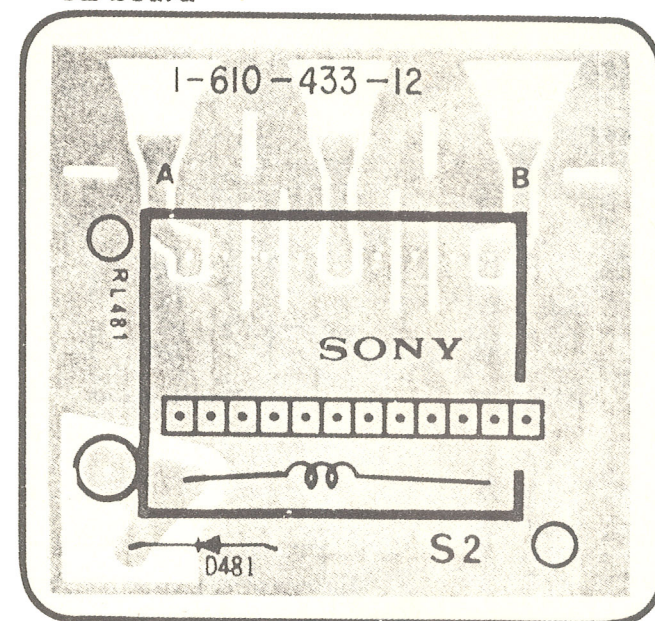

— N board —

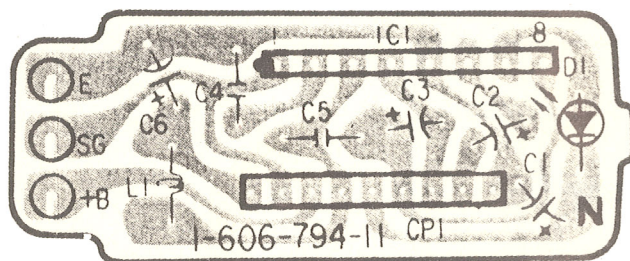

— J2 board —

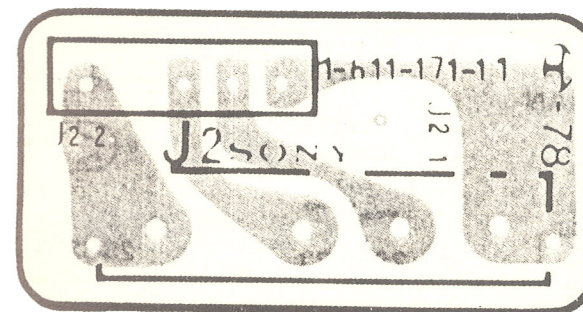

EXPLODED VIEWS


NOTE:

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remark column.

- As to the part numbered with E-, refer to the electrical parts list.
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

1. BEZEL

●: TA, BV3 x 12 7-685-648-71
 ▲: TA, BV4 x 16 7-685-663-71

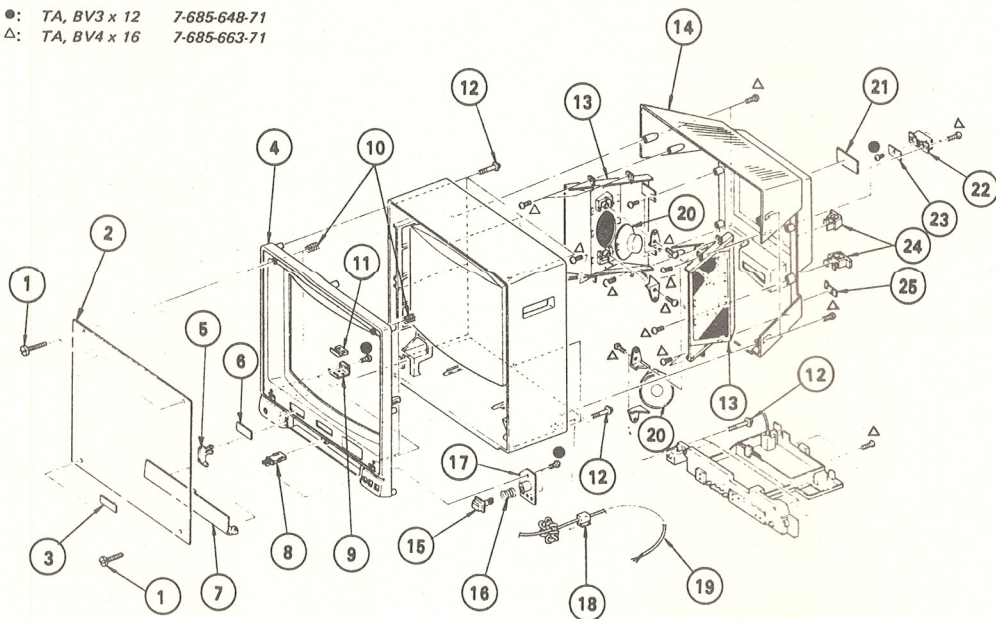


No.	Part No.	Description
1	4-336-851-11	SCREW, ORNAMENTAL
2	4-369-109-02	FILTER, GLASS
3	X-3701-084-0	EMBLEM (LARGE) ASSY, SONY
4	X-4369-108-3	BEZEL ASSY
5	4-362-203-00	SHAFT, DOOR
6	*4-362-289-00	PLATE, ORNAMENTAL, INDICATOR
7	4-362-225-11	DOOR, CONTROL
8	4-352-034-00	CATCHER, PUSH
9	*4-362-201-00	HOLDER, FILTER
10	4-357-414-00	NUT (MAX20)
11	4-336-808-00	PROTECTOR, FILTER
12	4-319-520-00	SCREW, SPECIAL (+PW4X30)
13	X-4362-203-2	PLATE ASSY, BAFFLE, SPEAKER

No.	Part No.	Description
14	4-369-113-00	COVER, BACK
15	X-4362-201-0	BUTTON ASSY, POWER
16	4-362-278-00	SPRING, COMPRESSION
17	*4-362-206-00	HOLDER, POWER BUTTON
18	▲4-022-115-01	HOLDER, AC CORD
19	▲1-551-270-31	CORD, POWER
20	1-503-270-00	SPEAKER
21	*4-369-154-01	LABEL, MODEL NUMBER
22	4-368-615-00	COVER, CONNECTOR
23	*1-611-171-00	J2 BOARD
24	4-369-108-00	HOLDER, CORD
25	4-329-127-00	CLAMP, CORD


2. CABINET

▲: TA, BV4 x 12 7-685-661-14

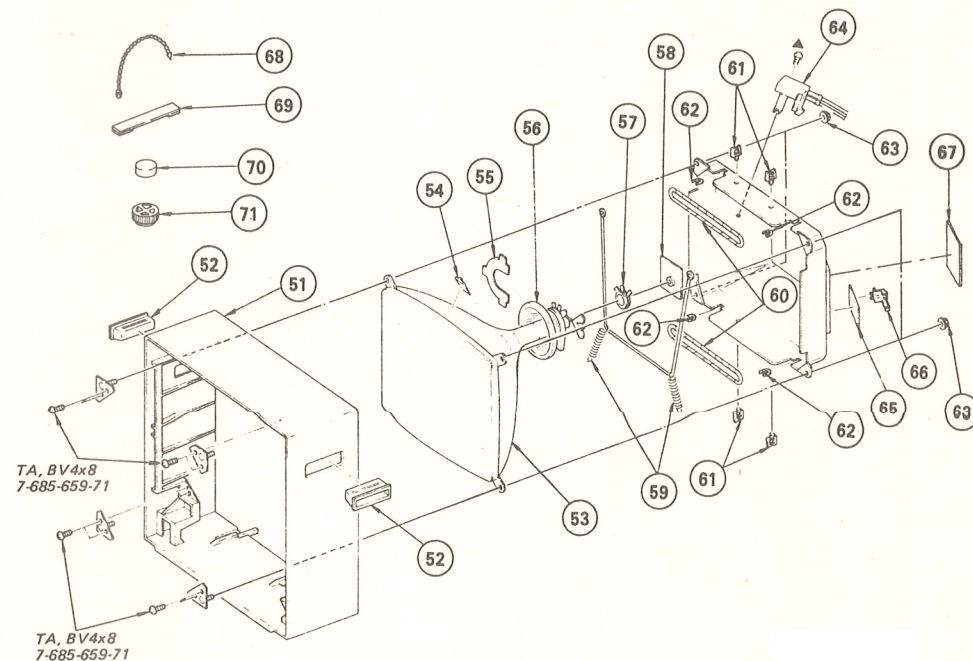

No.	Part No.	Description
51	X-4369-105-3	CABINET ASSY
52	4-318-207-21	HANDLE
53	▲8-738-405-05	CRT (6800B22)
54	3-703-003-00	SPACER, DY
55	1-452-146-21	MAGNET, BMC
56	▲1-451-226-11	DEFLECTION YOKE (SY105A)
57	▲1-452-315-11	CRT NECK ASSY (NA303)
58	*A-1330-475-A	C BOARD, COMPLETE
59	4-303-774-XX	SPRING
60	▲1-426-041-21	COIL, DEGAUSSING
61	*4-322-922-00	HOLDER, COIL, DEGAUSSER

No.	Part No.	Description
62	*4-330-306-00	BUSHING, CRT INSULATING
63	4-330-305-00	NUT, SPECIAL
64	▲1-228-544-11	RESISTOR ASSY, HIGH-VOLTAGE
65	*1-611-017-00	F BOARD
66	4-362-247-00	COVER, AC TERMINAL
67	*A-1325-009-A	V BOARD, COMPLETE
68	4-308-870-00	CLIP, LEAD WIRE
69	X-4308-815-0	PERMALLOY ASSY, CONVERGENCE
70	1-452-032-00	MAGNET, DISK; 10MM Ø
71	1-452-094-00	MAGNET, ROTATABLE DISK; 15MM Ø

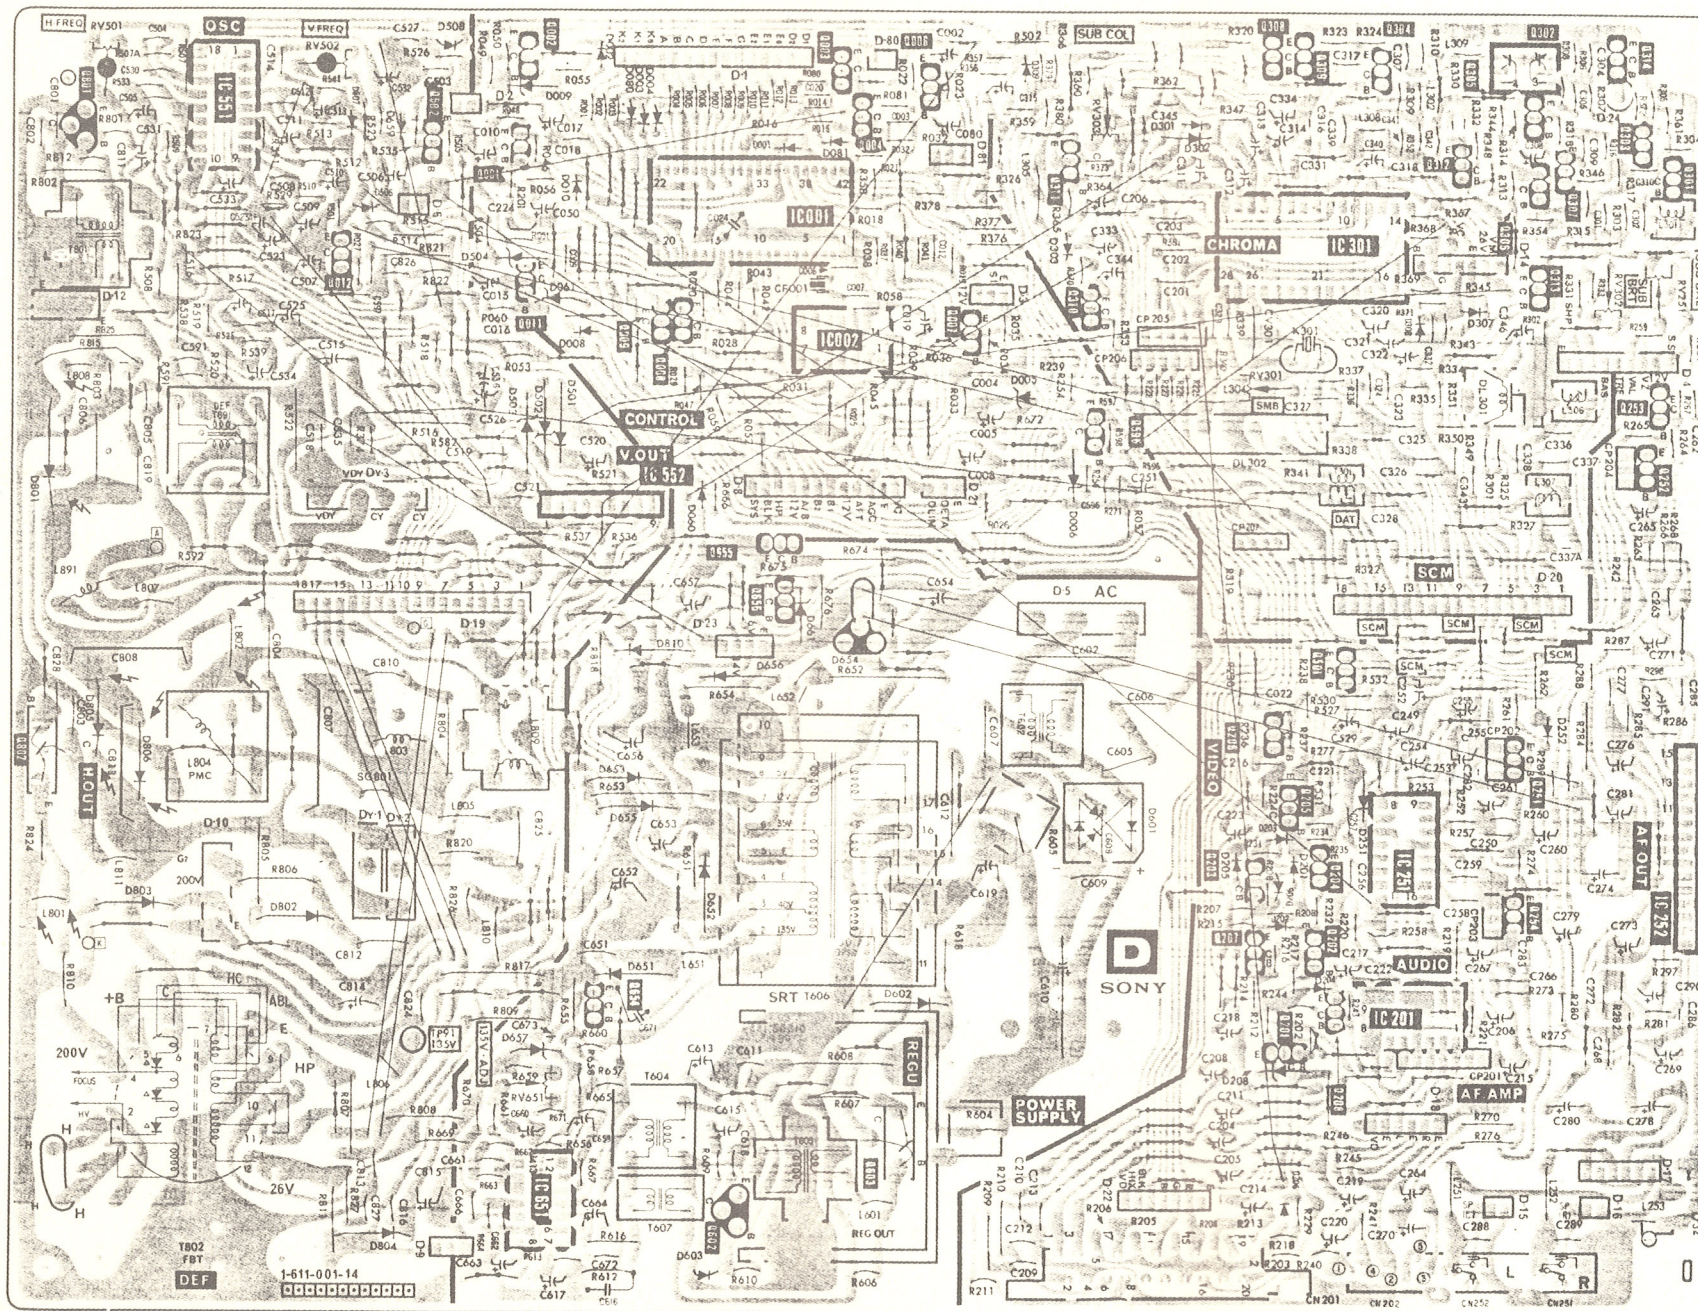

Q	IC	D	ADJ
002	308		
003	314		
006	302	002	502
004	304	009	501
IC551	305	001	080
		507	004
801	303	659	301
502	311	312	302
001	311	307	081
		301	
IC001	306	010	
		506	
		504	
IC301			
012		303	
011	313		
		504	
310		061	251
009			302
008		307	
		308	
IC002		008	
007			
			301
	253	005	
	596	503	
		502	
	252	501	
IC552		801	
		060	
655			
656			
		661	
		654	
501		810	
		656	
	206	805	252
802	251	806	
		653	
	205		
		655	251
IC251	203	601	
204			203
IC252		652	205
		201	206
		206	
254	803	802	202
202			
207		602	
		651	
IC201		204	
654			
208			
201		657	
		208	
603			651
IC651			
602		804	
		603	
Q	IC	D	ADJ

A

A

V

Ref.No.	Part No.	Description	Remark
C153	1-123-356-00	ELECT 10MF 20% 16V	
C154	1-101-004-00	CERAMIC 0.01MF 50V	
C155	1-123-332-00	ELECT 47MF 20% 16V	
C156	1-123-306-00	ELECT 47MF 20% 10V	
C157	1-123-306-00	ELECT 47MF 20% 10V	
C158	1-123-379-00	ELECT 0.47MF 20% 50V	
C159	1-102-816-00	CERAMIC 120PF 5% 50V	
C162	1-108-570-00	MYLAR 0.0043MF 5% 50V	
C163	1-136-159-00	FILM 0.033MF 5% 50V	
C164	1-106-184-00	MYLAR 0.0033MF 10% 100V	
C165	1-106-184-00	MYLAR 0.0033MF 10% 100V	
C167	1-106-184-00	MYLAR 0.0033MF 10% 100V	
C168	1-106-184-00	MYLAR 0.0033MF 10% 100V	
C169	1-123-356-00	ELECT 10MF 20% 16V	
C170	1-123-356-00	ELECT 10MF 20% 16V	
C171	1-123-318-00	ELECT 33MF 20% 16V	
C172	1-123-379-00	ELECT 0.47MF 20% 50V	
C173	1-123-379-00	ELECT 0.47MF 20% 50V	
C174	1-110-190-81	MYLAR 0.01MF 10% 400V	
C175	1-110-190-81	MYLAR 0.01MF 10% 400V	
C176	1-123-380-00	ELECT 1MF 20% 50V	
C177	1-123-380-00	ELECT 1MF 20% 50V	
C179	1-123-369-00	ELECT 4.7MF 20% 25V	
C180	1-106-184-00	MYLAR 0.0033MF 10% 100V	
C181	1-123-318-00	ELECT 33MF 20% 16V	
C182	1-123-307-00	ELECT 100MF 20% 10V	
C183	1-102-108-00	CERAMIC 150PF 10% 50V	
C184	1-102-973-00	CERAMIC 100PF 5% 50V	
C186	1-102-121-00	CERAMIC 0.0022MF 10% 50V	
C188	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C189	1-110-190-81	MYLAR 0.01MF 10% 400V	
DISCRIMINATOR			
CD151	1-404-501-00	DISCRIMINATOR, CERAMIC	
FILTER			
CF101	1-527-840-00	FILTER, CERAMIC	
CF102	1-404-134-00	TRAP, CERAMIC (5.5MHZ)	
CF151	1-527-839-00	FILTER, CERAMIC	
DIODE			
D101	8-719-911-19	DIODE 1SS119	
D102	8-719-911-19	DIODE 1SS119	
D103	8-719-102-71	DIODE R05.6E-N2	
D104	8-719-911-19	DIODE 1SS119	
D105	8-719-911-19	DIODE 1SS119	
D151	8-719-911-19	DIODE 1SS119	
D152	8-719-911-19	DIODE 1SS119	
D153	8-719-911-19	DIODE 1SS119	
D154	8-719-911-19	DIODE 1SS119	
D170	8-719-911-19	DIODE 1SS119	
D171	8-719-911-19	DIODE 1SS119	

Ref.No.	Part No.	Description	Remark
IC			
IC101	8-759-909-08	IC TDA3541	
IC102	8-759-909-54	IC TDA2546A	
IC103	8-759-800-12	IC LA7920	
IC151	8-759-007-54	IC TDA4940	
IC152	8-759-007-55	IC TDA4944	
COIL			
L101	1-404-476-00	COIL, IF	
L102	1-404-476-00	COIL, IF	
L103	1-408-399-00	MICRO INDUCTOR 1.5UH	
L104	1-408-406-00	MICRO INDUCTOR 5.6UH	
L105	1-404-477-00	COIL, IF	
L106	1-404-493-00	COIL	
L107	1-404-493-00	COIL	
L109	1-408-409-00	MICRO INDUCTOR 10UH	
L110	1-408-406-00	MICRO INDUCTOR 5.6UH	
L111	1-404-493-00	COIL	
L113	1-408-226-00	MICRO INDUCTOR 82UH	
L152	1-404-506-00	COIL, VARIABLE	
L170	1-408-247-00	MICRO INDUCTOR 33MH	
L171	1-408-408-00	MICRO INDUCTOR 8.2UH	
TRANSISTOR			
Q101	8-729-245-83	TRANSISTOR 2SC2458	
Q102	8-765-300-00	TRANSISTOR 2SC2009	
Q103	8-729-204-83	TRANSISTOR 2SA1048GR	
Q104	8-729-900-36	TRANSISTOR DTC124ES	
Q105	8-729-204-83	TRANSISTOR 2SA1048GR	
Q151	8-729-245-83	TRANSISTOR 2SC2458	
Q152	8-729-245-83	TRANSISTOR 2SC2458	
Q153	8-729-245-83	TRANSISTOR 2SC2458	
Q154	8-729-900-89	TRANSISTOR DTC144ES	
Q155	8-729-245-83	TRANSISTOR 2SC2458	
Q156	8-729-245-83	TRANSISTOR 2SC2458	
Q157	8-729-900-89	TRANSISTOR DTC144ES	
Q158	8-729-900-89	TRANSISTOR DTC144ES	
Q172	8-729-204-83	TRANSISTOR 2SA1048GR	
Q173	8-729-245-83	TRANSISTOR 2SC2458	
Q174	8-729-245-83	TRANSISTOR 2SC2458	
Q175	8-729-245-83	TRANSISTOR 2SC2458	
RESISTOR			
R101	1-215-738-91	METAL 1K 5% 1/6W	
R102	1-215-738-91	METAL 1K 5% 1/6W	
R103	1-215-786-91	METAL 100K 5% 1/6W	
R104	1-215-760-91	METAL 8.2K 5% 1/6W	
R105	1-215-760-91	METAL 8.2K 5% 1/6W	
R106	1-215-750-91	METAL 3.3K 5% 1/6W	
R107	1-215-750-91	METAL 3.3K 5% 1/6W	
R108	1-215-798-91	METAL 330K 5% 1/6W	
R109	1-215-746-91	METAL 2.2K 5% 1/6W	
R110	1-215-746-91	METAL 2.2K 5% 1/6W	


Ref.No.	Part No.	Description	Remark
R111	1-215-754-91	METAL 4.7K 5% 1/6W	
R112	1-215-722-91	METAL 220 5% 1/6W	
R113	1-215-752-91	METAL 3.9K 5% 1/6W	
R114	1-215-722-91	METAL 220 5% 1/6W	
R115	1-215-742-91	METAL 1.5K 5% 1/6W	
R116	1-215-730-91	METAL 470 5% 1/6W	
R118	1-215-722-91	METAL 220 5% 1/6W	
R119	1-215-730-91	METAL 470 5% 1/6W	
R120	1-215-778-91	METAL 47K 5% 1/6W	
R122	-215-762-91	METAL 10K 5% 1/6W	
R123	1-215-768-91	METAL 18K 5% 1/6W	
R124	1-215-764-91	METAL 12K 5% 1/6W	
R125	1-215-736-91	METAL 820 5% 1/6W	
R126	1-215-736-91	METAL 820 5% 1/6W	
R127	1-215-736-91	METAL 820 5% 1/6W	
R129	1-215-795-91	METAL 240K 5% 1/6W	
R131	1-215-778-91	METAL 47K 5% 1/6W	
R132	1-215-762-91	METAL 10K 5% 1/6W	
R134	1-215-782-91	METAL 68K 5% 1/6W	
R135	1-215-780-91	METAL 56K 5% 1/6W	
R136	1-215-770-91	METAL 22K 5% 1/6W	
R137	1-215-770-91	METAL 22K 5% 1/6W	
R140	1-215-738-91	METAL 1K 5% 1/6W	
R141	1-215-766-91	METAL 15K 5% 1/6W	
R142	1-215-786-91	METAL 100K 5% 1/6W	
R143	1-215-786-91	METAL 100K 5% 1/6W	
R151	1-215-651-00	METAL 1K 5% 1/6W	
R152	1-215-776-91	METAL 39K 5% 1/6W	
R153	1-215-728-91	METAL 390 5% 1/6W	
R155	1-215-770-91	METAL 22K 5% 1/6W	
R156	1-215-784-91	METAL 82K 5% 1/6W	
R157	1-215-762-91	METAL 10K 5% 1/6W	
R158	1-215-762-91	METAL 10K 5% 1/6W	
R159	1-215-754-91	METAL 4.7K 5% 1/6W	
R160	1-215-754-91	METAL 4.7K 5% 1/6W	
R161	1-215-754-91	METAL 4.7K 5% 1/6W	
R162	1-215-754-91	METAL 4.7K 5% 1/6W	
R166	1-215-750-91	METAL 3.3K 5% 1/6W	
R167	1-215-774-91	METAL 33K 5% 1/6W	
R168	1-215-770-91	METAL 22K 5% 1/6W	
R172	1-215-720-91	METAL 180 5% 1/6W	
R173	1-215-778-91	METAL 47K 5% 1/6W	
R174	1-215-796-91	METAL 270K 5% 1/6W	
R175	1-215-772-91	METAL 27K 5% 1/6W	
R176	1-215-738-91	METAL 1K 5% 1/6W	
R177	1-215-762-91	METAL 10K 5% 1/6W	
R178	1-215-762-91	METAL 10K 5% 1/6W	
R179	1-215-762-91	METAL 10K 5% 1/6W	
R180	1-215-738-91	METAL 1K 5% 1/6W	
R181	1-215-740-91	METAL 1.2K 5% 1/6W	
R182	1-215-746-91	METAL 2.2K 5% 1/6W	
R183	1-215-738-91	METAL 1K 5% 1/6W	
R184	1-215-724-91	METAL 270 5% 1/6W	

Ref.No.	Part No.	Description	Remark
R185	1-215-726-91	METAL 330 5% 1/6W	
R186	1-215-768-91	METAL 18K 5% 1/6W	
R188	1-215-180-00	METAL 15K 5% 1/4W	
R191	1-215-730-91	METAL 470 5% 1/6W	
R192	1-215-730-91	METAL 470 5% 1/6W	
R193	1-215-714-91	METAL 100 5% 1/6W	
VARIABLE RESISTOR			
RV101	1-228-727-00	RES, ADJ, CERAMIC CARBON 47K	
RV151	1-228-726-00	RES, ADJ, CERAMIC CARBON 33K	
FILTER			
SWF101	1-404-438-00	FILTER, SAW	

*A-1325-009-A V BOARD, COMPLETE *****			
CAPACITOR			
C2	1-123-380-00	ELECT 1MF 20% 50V	
C3	1-123-356-00	ELECT 10MF 20% 16V	
C4	1-106-220-00	MYLAR 0.1MF 10% 100V	
C5	1-123-356-00	ELECT 10MF 20% 16V	
C6	1-123-380-00	ELECT 1MF 20% 50V	
C7	1-101-004-00	CERAMIC 0.01MF 50V	
C8	1-123-356-00	CERAMIC 68PF 5% 50V	
C9	1-123-380-00	ELECT 1MF 20% 50V	
C10	1-102-074-00	CERAMIC 0.001MF 10% 50V	
C11	1-106-220-00	MYLAR 0.1MF 10% 100V	
C12	1-101-984-00	CERAMIC 47PF 5% 50V	
C13	1-102-773-00	CERAMIC 330PF 5% 50V	
C14	1-102-074-00	CERAMIC 0.001MF 10% 50V	
C15	1-123-332-00	ELECT 47MF 20% 16V	
C16	1-123-297-85	ELECT 330MF 20% 6.3V	
C17	1-102-074-00	CERAMIC 0.001MF 10% 50V	
C18	1-102-074-00	CERAMIC 0.001MF 10% 50V	
C19	1-102-973-00	CERAMIC 100PF 5% 50V	
C20	1-123-356-00	ELECT 10MF 20% 16V	
C21	1-102-074-00	CERAMIC 0.001MF 10% 50V	
C22	1-123-369-00	ELECT 4.7MF 20% 25V	
C23	1-123-321-00	ELECT 220MF 20% 16V	
C31	1-106-220-00	MYLAR 0.1MF 10% 100V	
C32	1-106-220-00	MYLAR 0.1MF 10% 100V	
C34	1-106-220-00	MYLAR 0.1MF 10% 100V	
C35	1-106-220-00	MYLAR 0.1MF 10% 100V	
C36	1-106-220-00	MYLAR 0.1MF 10% 100V	
C37	1-106-220-00	MYLAR 0.1MF 10% 100V	
C38	1-106-220-00	MYLAR 0.1MF 10% 100V	
C39	1-123-298-00	ELECT 470MF 20% 6.3V	
C40	1-108-620-91	MYLAR 0.0033MF 10% 100V	
C064	1-123-317-81	ELECT 22MF 20% 16V	

3. CHASSIS

■: TA, BV3x8 7-685-646-71
 ●: TA, BV3x12 7-685-648-71

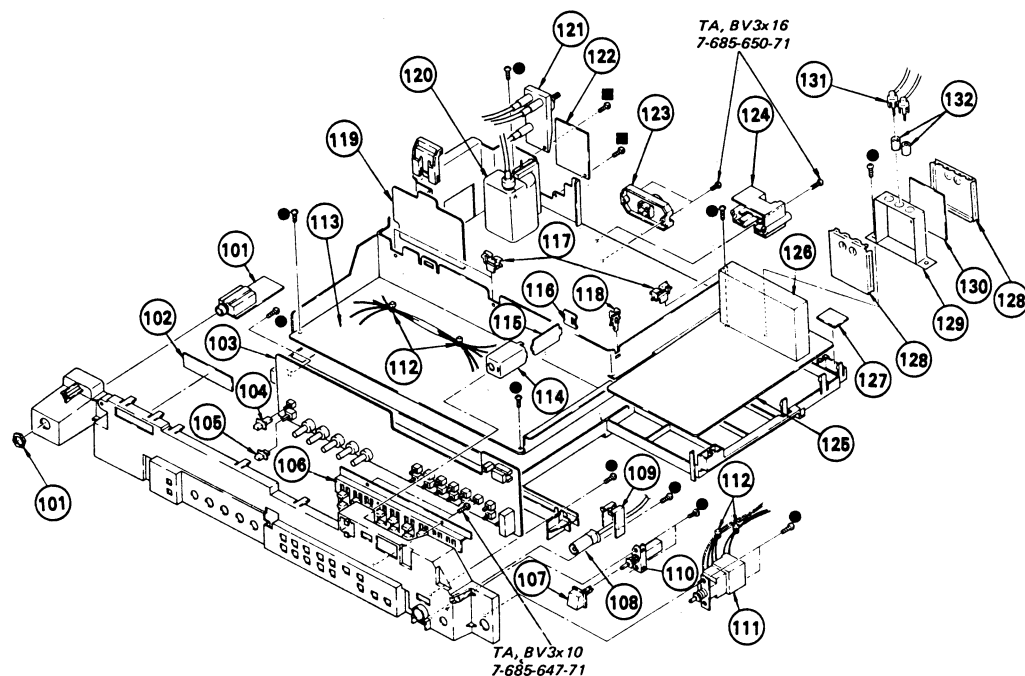

No.	Part No.	Description	Remark	No.	Part No.	Description	Remark
101	*1-611-170-00	J1 BOARD		117	*3-646-071-00	HOLDER, WIRE	
102	*1-611-187-21	H2 BOARD		118	4-343-134-00	RETAINER, AC CORD	
103	*1-611-002-00	H1 BOARD		119	*A-1340-574-A	D1 BOARD, COMPLETE	
104	4-368-610-00	PUSH BUTTON (B)		120	Δ 1-439-332-21	TRANSFORMER, ASSY, FLYBACK	
105	4-362-211-00	PUSH BUTTON		121	Δ 1-215-066-21	RES ASSY, HIGH-VOLTAGE	
106	4-368-612-11	BUTTON, MULTI		122	*1-611-015-00	D2 BOARD	
107	4-369-118-00	BUTTON, HIT SWITCH		123	Δ 1-536-849-11	TERMINAL BOARD ASSY, ANTENNA	
108	Δ 1-557-117-12	SOCKET, PAL ANTENNA (WITH CABLE)		124	*4-368-616-00	BRACKET, CONNECTOR	
109	*4-369-105-11	BRACKET, HIT SWITCH		125	*A-1295-910-A	A BOARD, COMPLETE	
110	Δ 1-552-806-21	SWITCH, PUSH		126	Δ 1-463-421-21	TUNER, ET (BT-883)	126
111	Δ 1-553-225-12	SWITCH, PUSH		127	*1-610-433-00	S2 BOARD	
112	3-701-748-00	CLAMP		128	*4-368-114-00	CASE (LTD), RELAY	
113	*A-1345-486-A	D BOARD, COMPLETE	117,118,120	129	*4-368-115-00	CASE (MAIN), RELAY	
114	*4-342-117-00	CASE, SHIELD (MAIN), R		130	*1-611-172-00	S BOARD	
115	*1-606-794-00	N BOARD		131	*1-557-261-11	CABLE, P-P	
116	*4-342-118-00	LID, SHIELD CASE, R		132	*1-507-900-00	JACK	

F A

ELECTRICAL PARTS LIST

NOTE:

• Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
 • All variable and adjustable resistors have characteristic curve B, unless otherwise noted.

CAPACITORS
 • MF : μF , PF : $\mu\mu F$

RESISTORS
 • All resistors are in ohms
 • F : nonflammable

COILS
 • MH : mH, UH : μH

Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark
	*1-611-017-00	F BOARD	*****			CONNECTOR	
		CAPACITOR		A1	*1-560-124-00	PLUG, CONNECTOR (2.5MM) 4P	
C1601	Δ 1-117-121-51	PAPER	0.22MF 20% 250V	A2	*1-560-126-00	PLUG, CONNECTOR (2.5MM) 6P	
C1603	Δ 1-161-738-12	CERAMIC	0.0047MF 20% 400V	A3	*1-560-156-00	PLUG, CONNECTOR (2.5MM PITCH)	
C1604	Δ 1-161-738-12	CERAMIC	0.0047MF 20% 400V			CAPACITOR	
C1655	1-123-332-00	ELECT	47MF 20% 16V	C102	1-110-175-81	MYLAR	0.1MF 10% 100V
C1668	1-123-346-00	ELECT	220MF 20% 35V	C103	1-110-175-81	MYLAR	0.1MF 10% 100V
		DIODE		C104	1-123-356-00	ELECT	10MF 20% 16V
D1658	8-719-000-06	DIODE MC921		C105	1-123-356-00	ELECT	10MF 20% 16V
		CONNECTOR		C106	1-123-318-00	ELECT	33MF 20% 16V
F1	*1-506-349-21	3P PLUG (L)		C107	1-123-330-00	ELECT	22MF 20% 16V
F2	*1-508-765-00	3P PLUG (M)		C108	1-110-173-81	MYLAR	0.068MF 10% 100V
F3	*1-508-786-00	2P PLUG (M)		C109	1-110-173-81	MYLAR	0.068MF 10% 100V
F4	*1-506-349-21	3P PLUG (L)		C110	1-102-963-00	CERAMIC	33PF 5% 50V
F5	*1-560-290-00	PLUG, CONNECTOR (2.5MM PITCH)		C111	1-123-318-00	ELECT	33MF 20% 16V
F6	*1-506-349-21	3P PLUG (L)		C112	1-102-530-00	CERAMIC	120PF 5% 50V
		FUSE		C113	1-102-529-00	CERAMIC	100PF 5% 50V
F1601	Δ 1-532-465-51	FUSE, TIME LAG 3.15A		C114	1-102-851-00	CERAMIC	15PF 5% 50V
	1-533-149-00	HOLDER, FUSE; F1601		C115	1-102-523-00	CERAMIC	56PF 5% 50V
		IC		C116	1-102-125-00	CERAMIC	0.0047MF 10% 50V
IC1652	8-759-178-12	IC UPC78L12		C117	1-102-125-00	CERAMIC	0.0047MF 10% 50V
		THERMISTOR		C118	1-102-125-00	CERAMIC	0.0047MF 10% 50V
PTH1601	Δ 1-806-387-11	THERMISTOR (POSITIVE)		C119	1-102-125-00	CERAMIC	0.0047MF 10% 50V
		RESISTOR		C119	1-102-125-00	CERAMIC	0.0047MF 10% 50V
R1601	Δ 1-217-328-11	WIREWOUND	2.7 10% 7W F	C120	1-102-125-00	CERAMIC	0.0047MF 10% 50V
R1602	Δ 1-214-937-81	METAL	1M 1% 1/2W	C121	1-102-125-00	CERAMIC	0.0047MF 10% 50V
R1603	Δ 1-247-289-11	CARBON	8.2M 5% 1W	C123	1-102-108-00	CERAMIC	150PF 10% 50V
R1614	Δ 1-205-653-11	CEMENTED	100 5% 5W	C124	1-130-014-00	FILM	470PF 5% 50V
R1675	Δ 1-202-854-11	SOLID	10 1/4W F	C126	1-123-318-00	ELECT	33MF 20% 16V
R1676	Δ 1-202-854-11	SOLID	10 1/4W F	C127	1-102-125-00	CERAMIC	0.0047MF 10% 50V
		TRANSFORMER		C128	1-101-004-00	CERAMIC	0.01MF 50V
T1601	Δ 1-421-352-11	TRANSFORMER, FERRITE		C129	1-101-004-00	CERAMIC	0.01MF 50V
T1603	Δ 1-447-703-12	TRANSFORMER, POWER		C130	1-102-125-00	CERAMIC	0.0047MF 10% 50V
		*****		C131	1-123-381-00	ELECT	2.2MF 20% 50V
	*A-1295-910-A	A BOARD, COMPLETE	*****	C132	1-102-125-00	CERAMIC	0.0047MF 10% 50V
	Δ 1-463-421-21	TUNER, ET (BT-883)		C133	1-102-125-00	CERAMIC	0.0047MF 10% 50V
	*4-363-672-00	CASE (MAIN), SHIELD, VIF		C134	1-102-125-00	CERAMIC	0.0047MF 10% 50V
	*4-363-673-00	CASE (BOTTOM LTD), SHIELD, VIF		C135	1-102-525-00	CERAMIC	68PF 5% 50V
	*4-363-674-00	CASE (UPPER LTD), SHIELD, VIF		C136	1-102-525-00	CERAMIC	68PF 5% 50V
				C137	1-102-125-00	CERAMIC	0.0047MF 10% 50V
				C138	1-123-286-00	ELECT	0.33MF 20% 50V
				C139	1-102-125-00	CERAMIC	0.0047MF 10% 50V
				C140	1-102-125-00	CERAMIC	0.0047MF 10% 50V
				C141	1-123-318-00	ELECT	33MF 20% 16V
				C142	1-102-525-00	CERAMIC	68PF 5% 50V
				C143	1-101-004-00	CERAMIC	0.01MF 50V
				C144	1-123-286-00	ELECT	0.33MF 20% 50V
				C145	1-102-961-00	CERAMIC	27PF 5% 50V
				C146	1-123-380-00	ELECT	1MF 20% 50V
				C151	1-101-004-00	CERAMIC	0.01MF 50V
				C152	1-101-004-00	CERAMIC	0.01MF 50V

D1 D2 D

Ref.No.	Part No.	Description				Remark	Ref.No.	Part No.	Description				Remark	Ref.No.	Part No.	Description				Remark
R721	1-213-163-00	METAL OXIDE	47K	5%	1W	F	*A-1340-574-A	D1 BOARD, COMPLETE							*1-611-015-00	D2 BOARD				
R722	1-202-824-00	SOLID	3.3K		1/2W		*****									*****				
R723	1-202-824-00	SOLID	3.3K		1/2W															
R724	1-202-824-00	SOLID	3.3K		1/2W		CAPACITOR													
R725	1-215-176-00	METAL	10K	5%	1/4W															
R726	1-214-964-00	METAL	1M	1%	1/4W		C1528	1-124-038-00	ELECT	1MF	20%	50V								
R727	1-215-176-00	METAL	10K	5%	1/4W		C1551	1-124-036-00	ELECT	330MF	20%	16V								
R728	1-214-958-00	METAL	560K	1%	1/4W		C1552	1-123-973-00	ELECT	100MF	20%	16V								
R729	1-214-787-00	METAL	270K	1%	1/4W		C1553	1-123-973-00	ELECT	100MF	20%	16V								
R730	1-202-838-00	SOLID	100K		1/2W		C1555	1-124-045-51	ELECT	4.7MF	20%	50V								
R731	1-202-843-51	SOLID	270K		1/2W		C1556	1-124-125-00	ELECT	22MF	20%	25V								
R732	1-202-814-51	SOLID	33K		1/2W		C1557	1-124-044-51	ELECT	3.3MF	20%	50V								
R733	1-202-719-00	SOLID	1M	10%	1/2W		C1558	1-124-130-00	ELECT	100MF	20%	63V								
R734	1-202-814-51	SOLID	33K		1/2W		C1559	1-110-181-81	MYLAR	0.018MF	10%	250V								
R735	1-202-842-51	SOLID	220K		1/2W		C1560	1-110-181-81	MYLAR	0.018MF	10%	250V								
R736	1-202-846-00	SOLID	470K		1/2W		C1561	1-110-174-81	MYLAR	0.082MF	10%	100V								
R737	1-215-720-91	METAL	180	5%	1/6W		C1562	1-124-039-51	ELECT	10MF	20%	16V								
R738	1-215-156-00	METAL	1.5K	5%	1/4W		C1563	1-110-182-81	MYLAR	0.022MF	10%	250V								
R739	1-215-176-00	METAL	10K	5%	1/4W		C1564	1-129-701-00	FILM	0.01MF	5%	100V								
R740	1-207-451-00	WIREWOUND	0.1	10%	1/2W		C1565	1-110-188-81	MYLAR	0.0068MF	10%	400V								
R746	1-215-778-91	METAL	47K	5%	1/6W		C1567	1-110-190-81	MYLAR	0.01MF	10%	400V								
R747	1-215-762-91	METAL	10K	5%	1/6W		C1568	1-123-973-00	ELECT	100MF	20%	16V								
R751	1-215-740-91	METAL	1.2K	5%	1/6W		C1569	1-110-182-81	MYLAR	0.022MF	10%	250V								
R752	1-215-756-91	METAL	5.6K	5%	1/6W		C1570	1-110-190-81	MYLAR	0.01MF	10%	400V								
R753	1-215-732-91	METAL	560	5%	1/6W		C1573	1-124-038-00	ELECT	1MF	20%	50V								
R754	1-215-772-91	METAL	27K	5%	1/6W		C1574	1-110-182-81	MYLAR	0.022MF	10%	250V								
R755	1-215-714-91	METAL	100	5%	1/6W		C1575	1-110-190-81	MYLAR	0.01MF	10%	400V								

V

V

C

Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark
CONNECTOR				Q11	8-729-245-83	TRANSISTOR 2SC2458		R65	1-215-716-91	METAL 120 5% 1/6W		D707	8-719-911-19	DIODE 1SS119	
CN1	*1-560-852-00	PLUG, CONNECTOR 7P		Q12	8-729-245-83	TRANSISTOR 2SC2458		R66	1-215-716-91	METAL 120 5% 1/6W		D708	8-719-911-19	DIODE 1SS119	
CN2	*1-560-852-00	PLUG, CONNECTOR 7P		Q13	8-729-245-83	TRANSISTOR 2SC2458		R67	1-215-716-91	METAL 120 5% 1/6W		D709	8-719-911-19	DIODE 1SS119	
CN3	*1-560-852-00	PLUG, CONNECTOR 7P		Q14	8-729-245-83	TRANSISTOR 2SC2458		VARIABLE RESISTOR				D710	8-719-911-19	DIODE 1SS119	
V1	*1-560-124-00	PLUG, CONNECTOR (2.5MM PITCH)		RESISTOR				RV1	1-228-724-00	RES, ADJ, CARBON 10K		D711	8-719-911-19	DIODE 1SS119	
V2	*1-560-124-00	PLUG, CONNECTOR (2.5MM PITCH)		R1	1-215-786-91	METAL 100K 5% 1/6W		RV2	1-226-852-00	RES, ADJ, CARBON 22K		COIL			
V4	*1-560-124-00	PLUG, CONNECTOR (2.5MM PITCH)		R2	1-215-758-91	METAL 6.8K 5% 1/6W		RV3	1-228-881-00	RES, ADJ, CARBON 100		L751	1-408-413-00	MICRO INDUCTOR 22UH	
V5	*1-560-124-00	PLUG, CONNECTOR (2.5MM PITCH)		R3	1-215-758-91	METAL 6.8K 5% 1/6W		COIL				NEON LAMP			
V6	*1-508-784-00	IP PLUG		R4	1-215-738-91	METAL 1K 5% 1/6W		T1	1-404-292-00	COIL		NL701	1-519-108-XX	LAMP, NEON ASSY	
V9	*1-560-126-00	PLUG, CONNECTOR (2.5MM PITCH)		R5	1-215-742-91	METAL 1.5K 5% 1/6W		CRYSTAL				TRANSISTOR			
V11	*1-560-124-00	PLUG, CONNECTOR (2.5MM) 4P		R6	1-215-774-91	METAL 33K 5% 1/6W		X01	1-567-162-00	OSCILLATOR, CRYSTAL		Q701	8-729-245-83	TRANSISTOR 2SC2458	
V12	*1-560-123-00	PLUG, CONNECTOR (2.5MM) 3P		R7	1-215-740-91	METAL 1.2K 5% 1/6W		*****				Q702	8-729-245-83	TRANSISTOR 2SC2458	
V13	*1-560-127-00	PLUG, CONNECTOR (2.5MM) 7P		R8	1-215-740-91	METAL 1.2K 5% 1/6W		*A-1330-475-A C BOARD, COMPLETE *****				Q703	8-729-245-83	TRANSISTOR 2SC2458	
TRIMMER				R9	1-215-734-91	METAL 680 5% 1/6W		1-526-644-41 SOCKET, CRT				Q704	8-729-322-78	TRANSISTOR 2SC2278	
CV1	1-141-181-11	CAP, TRIMMER		R10	1-215-742-91	METAL 1.5K 5% 1/6W		CONNECTOR				Q705	8-729-322-78	TRANSISTOR 2SC2278	
DIODE				R11	1-215-740-91	METAL 1.2K 5% 1/6W		C1	*1-508-765-00	3P PLUG (M)		Q706	8-729-322-78	TRANSISTOR 2SC2278	
D1	8-719-100-68	DIODE RD13E-B2		R12	1-215-730-91	METAL 470 5% 1/6W		C2	*1-560-290-00	PLUG, CONNECTOR (2.5MM PITCH)		Q707	8-729-255-12	TRANSISTOR 2SC2551	
D2	8-719-100-36	DIODE RD5.6E-B3		R13	1-215-730-91	METAL 470 5% 1/6W		C3	*1-560-123-00	PLUG, CONNECTOR (2.5MM) 3P		Q708	8-729-255-12	TRANSISTOR 2SC2551	
D3	8-719-100-36	DIODE RD5.6E-B3		R14	1-213-139-00	METAL OXIDE 470 5% 1W F		CAPACITOR				Q709	8-729-255-12	TRANSISTOR 2SC2551	
D4	8-719-911-19	DIODE 1SS119		R15	1-247-228-00	CARBON 330 5% 1/2W		C701	1-102-973-00	CERAMIC 100PF 5% 50V		Q710	8-729-200-17	TRANSISTOR ZSA1091	
D5	8-719-911-19	DIODE 1SS119		R16	1-215-738-91	METAL 1K 5% 1/6W		C702	1-102-973-00	CERAMIC 100PF 5% 50V		Q711	8-729-200-17	TRANSISTOR ZSA1091	
D6	8-719-911-19	DIODE 1SS119		R22	1-215-786-91	METAL 100K 5% 1/6W		C703	1-102-973-00	CERAMIC 100PF 5% 50V		Q712	8-729-200-17	TRANSISTOR ZSA1091	
D7	8-719-911-19	DIODE 1SS119		R26	1-215-718-91	METAL 150 5% 1/6W		C704	1-121-759-00	ELECT 4.7MF 250V		Q713	8-729-245-83	TRANSISTOR 2SC2458	
IC				R27	1-215-718-91	METAL 150 5% 1/6W		C705	1-102-249-00	CERAMIC 680PF 20% 2KV		Q751	8-729-245-83	TRANSISTOR 2SC2458	
IC1	8-759-950-30	IC SAA5030		R28	1-215-718-91	METAL 150 5% 1/6W		RESISTOR				Q752	8-729-245-83	TRANSISTOR 2SC2458	
IC2	8-759-960-40	IC SAA5040B		R29	1-215-710-91	METAL 68 5% 1/6W		R701	1-215-762-91	METAL 10K 5% 1/6W		Q753	8-729-103-43	TRANSISTOR ZSB734	
IC3	8-759-950-20	IC SAA5020		R30	1-215-762-91	METAL 10K 5% 1/6W		R702	1-215-762-91	METAL 10K 5% 1/6W		Q754	8-729-177-43	TRANSISTOR ZSD774	
IC4	8-759-950-50	IC SAA5050		R31	1-215-738-91	METAL 1K 5% 1/6W		R703	1-215-762-91	METAL 10K 5% 1/6W		*****			
IC5	8-759-901-28	IC MSM5128-12RS		R32	1-215-756-91	METAL 5.6K 5% 1/6W		R704	1-215-744-91	METAL 1.8K 5% 1/6W		R706	1-215-744-91	METAL 1.8K 5% 1/6W	
IC6	8-759-900-02	IC SN74LS02N		R33	1-215-776-91	METAL 39K 5% 1/6W		R705	1-215-744-91	METAL 1.8K 5% 1/6W		R707	1-215-762-91	METAL 10K 5% 1/6W	
IC7	8-759-900-83	IC SN74LS83AN		R34	1-215-754-91	METAL 4.7K 5% 1/6W		C706	1-129-779-00	FILM 0.022MF 20% 1KV		R708	1-215-762-91	METAL 10K 5% 1/6W	
IC8	8-759-901-61	IC SN74LS161AN		R35	1-215-746-91	METAL 2.2K 5% 1/6W		C707	1-123-383-00	ELECT 4.7MF 20% 100V		R709	1-215-762-91	METAL 10K 5% 1/6W	
IC9	8-759-901-61	IC SN74LS161AN		R36	1-215-778-91	METAL 47K 5% 1/6W		C708	1-123-333-00	ELECT 100MF 20% 25V		R710	1-215-733-91	METAL 620 5% 1/6W	
COIL				R37	1-215-772-91	METAL 27K 5% 1/6W		C711	1-123-356-00	ELECT 10MF 20% 50V		R711	1-215-733-91	METAL 620 5% 1/6W	
L1	1-404-291-00	COIL		R38	1-215-738-91	METAL 1K 5% 1/6W		C751	1-101-361-00	CERAMIC 150PF 5% 50V		R712	1-215-733-91	METAL 620 5% 1/6W	
TRANSISTOR				R39	1-215-760-91	METAL 8.2K 5% 1/6W		C752	1-106-178-00	MYLAR 0.0018MF 10% 100V		R713	1-206-692-00	METAL OXIDE 15K 5% 2W F	
Q1	8-729-109-53	TRANSISTOR 2SD795A		R40	1-215-758-91	METAL 6.8K 5% 1/6W		C753	1-110-190-81	MYLAR 0.01MF 10% 400V		R714	1-206-692-00	METAL OXIDE 15K 5% 2W F	
Q2	8-729-109-53	TRANSISTOR 2SD795A		R41	1-215-746-91	METAL 2.2K 5% 1/6W		C754	1-110-190-81	MYLAR 0.01MF 10% 400V		R715	1-206-692-00	METAL OXIDE 15K 5% 2W F	
Q3	8-729-245-83	TRANSISTOR 2SC2458		R42	1-215-728-91	METAL 390 5% 1/6W		C757	1-110-175-81	MYLAR 0.1MF 10% 100V		R716	1-247-038-00	CARBON 560 5% 1/8W F	
Q4	8-729-245-83	TRANSISTOR 2SC2458		R43	1-215-740-91	METAL 1.2K 5% 1/6W		C759	1-123-356-00	ELECT 10MF 20% 50V		R717	1-247-038-00	CARBON 560 5% 1/8W F	
Q5	8-729-204-83	TRANSISTOR 2SA1048GR		R44	1-215-738-91	METAL 1K 5% 1/6W		C761	1-123-372-00	ELECT 33MF 20% 50V		R718	1-247-038-00	CARBON 560 5% 1/8W F	
Q6	8-729-204-83	TRANSISTOR 2SA1048GR		R45	1-215-758-91	METAL 6.8K 5% 1/6W		DIODE				R719	1-213-163-00	METAL OXIDE 47K 5% 1W F	
Q7	8-729-204-83	TRANSISTOR 2SA1048GR		R46	1-215-762-91	METAL 10K 5% 1/6W		D701	8-719-911-19	DIODE 1SS119		R720	1-213-163-00	METAL OXIDE 47K 5% 1W F	
Q8	8-729-245-83	TRANSISTOR 2SC2458		R48	1-215-770-91	METAL 22K 5% 1/6W		D702	8-719-911-19	DIODE 1SS119		*****			
Q9	8-729-245-83	TRANSISTOR 2SC2458		R56	1-215-762-91	METAL 10K 5% 1/6W		D703	8-719-911-19	DIODE 1SS119		*****			
Q10	8-729-245-83	TRANSISTOR 2SC2458		R56	1-215-762-91	METAL 10K 5% 1/6W		D704	8-719-100-68	DIODE RD13E-B2		*****			
*****				R60	1-215-786-91	METAL 100K 5% 1/6W		D705	8-719-911-19	DIODE 1SS119		*****			
*****				R61	1-215-786-91	METAL 100K 5% 1/6W		D706	8-719-911-19	DIODE 1SS119		*****			
*****				R62	1-215-722-91	METAL 220 5% 1/6W		*****				*****			
*****				R63	1-215-740-91	METAL 1.2K 5% 1/6W		*****				*****			
*****				R64	1-215-734-91	METAL 680 5% 1/6W		*****				*****			



Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark
D24	*1-508-784-00	1P PLUG		D801	8-719-900-26	DIODE ERD29-08J		TRANSISTOR			
D80	*1-560-290-00	PLUG, CONNECTOR (2.5MM PITCH)		D802	8-719-903-09	DIODE V30N		RESISTOR			
D81	*1-560-123-00	PLUG, CONNECTOR (2.5MM) 3P		D803	8-719-901-93	DIODE V19E		R001	1-215-738-91	METAL	1K 5% 1/6W
DY1	*1-508-765-00	3P PLUG (M)		D804	8-719-901-93	DIODE V19E		R002	1-215-738-91	METAL	1K 5% 1/6W
DY2	*1-508-765-00	3P PLUG (M)		D805	8-719-305-15	DIODE GH3F		R003	1-215-738-91	METAL	1K 5% 1/6W
DY3	*1-508-766-00	4P PLUG (M)		D806	8-719-305-15	DIODE GH3F		R004	1-215-722-91	METAL	220 5% 1/6W
DIODE				D810	8-719-907-40	DIODE ERB43-02		R005	1-215-722-91	METAL	220 5% 1/6W
D001	8-719-911-19	DIODE ISS119		DELAY LINE				R006	1-215-722-91	METAL	220 5% 1/6W
D002	8-719-911-19	DIODE ISS119		DL301	1-415-336-00	DELAY LINE, Y		R007	1-215-722-91	METAL	220 5% 1/6W
D004	8-719-911-19	DIODE ISS119		DL302	1-415-185-12	DELAY LINE (1H)		R008	1-215-722-91	METAL	220 5% 1/6W
D005	8-759-157-41	IC UPC574J-G		IC				R009	1-215-722-91	METAL	220 5% 1/6W
D006	8-719-101-02	DIODE RD30E-B4		IC001	8-759-602-09	IC CX523-110P		R010	1-215-722-91	METAL	220 5% 1/6W
D008	8-719-911-19	DIODE ISS119		IC002	8-759-600-92	IC M58657P		R011	1-215-714-91	METAL	100 5% 1/6W
D009	8-719-101-35	DIODE RD3.0E-L2		IC201	8-759-340-53	IC HD140538P		R012	1-215-706-91	METAL	47 5% 1/6W
D010	8-719-911-19	DIODE ISS119		IC251	8-759-276-30	IC TA7630P		R014	1-215-754-91	METAL	4.7K 5% 1/6W
D060	8-719-911-19	DIODE ISS119		IC252	8-749-943-62	IC STK-4362		R015	1-215-754-91	METAL	4.7K 5% 1/6W
D061	8-719-100-35	DIODE RD5.6E-B2		IC301	6-066-720-60	IC TDA3562A		R016	1-215-168-00	METAL	4.7K 5% 1/4W
D080	8-719-911-19	DIODE ISS119		IC551	8-759-907-56	IC TDA2578A		R018	1-215-738-91	METAL	1K 5% 1/6W
D081	8-719-911-19	DIODE ISS119		IC552	8-759-907-57	IC TDA3652		R019	1-215-782-91	METAL	68K 5% 1/6W
D201	8-719-911-19	DIODE ISS119		IC651	8-759-100-75	IC UPC1394C		R021	1-215-766-91	METAL	15K 5% 1/6W
D202	8-719-911-19	DIODE ISS119		COIL				R022	1-215-766-91	METAL	15K 5% 1/6W
D203	8-719-911-19	DIODE ISS119		L251	1-408-300-00	MICRO INDUCTOR 6.8UH		R023	1-215-714-91	METAL	100 5% 1/6W
D204	8-719-911-19	DIODE ISS119		L252	1-408-300-00	MICRO INDUCTOR 6.8UH		R024	1-215-180-00	METAL	15K 5% 1/4W
D205	8-719-911-19	DIODE ISS119		L253	1-408-300-00	MICRO INDUCTOR 6.8UH		R025	1-215-770-91	METAL	22K 5% 1/6W
D206	8-719-911-19	DIODE ISS119		L301	1-404-495-00	COIL		R027	1-215-770-91	METAL	22K 5% 1/6W
D208	8-719-100-66	DIODE RD12E-B3		L302	1-408-421-00	MICRO INDUCTOR 100UH		R028	1-215-770-91	METAL	22K 5% 1/6W
D251	8-719-100-43	DIODE RD7.5E-B1		L304	1-408-411-00	MICRO INDUCTOR 15UH		R029	1-215-770-91	METAL	22K 5% 1/6W
D252	8-719-911-19	DIODE ISS119		L305	1-408-227-00	MICRO INDUCTOR 470UH		R030	1-215-770-91	METAL	22K 5% 1/6W
D301	8-719-911-19	DIODE ISS119		L306	1-404-494-00	COIL		R031	1-215-770-91	METAL	22K 5% 1/6W
D303	8-719-911-19	DIODE ISS119		L307	1-404-498-00	COIL		R032	1-215-770-91	METAL	22K 5% 1/6W
D307	8-719-911-19	DIODE ISS119		L308	1-408-415-00	MICRO INDUCTOR 33UH		R033	1-215-770-91	METAL	22K 5% 1/6W
D308	8-719-911-19	DIODE ISS119		L309	1-408-414-00	MICRO INDUCTOR 27UH		R034	1-215-770-91	METAL	22K 5% 1/6W
D309	8-719-911-19	DIODE ISS119		L601	1-407-365-00	COIL, CHOKE		R035	1-215-770-91	METAL	22K 5% 1/6W
D501	8-719-200-02	DIODE 10E2		L651	1-425-613-00	COIL, AIR-CORE, QF TYPE		R037	1-215-738-91	METAL	1K 5% 1/6W
D502	8-719-931-22	DIODE EQB01-22		L652	1-459-442-00	COIL (WITH CORE)		R038	1-215-748-91	METAL	2.7K 5% 1/6W
D503	8-719-992-42	DIODE EQA01-24R2		L801	1-407-365-00	COIL, CHOKE		R039	1-215-714-91	METAL	100 5% 1/6W
D504	8-719-102-78	DIODE RD6.8E-N2		L802	1-408-225-00	MICRO INDUCTOR 3.3UH		R040	1-215-770-91	METAL	22K 5% 1/6W
D506	8-719-911-19	DIODE ISS119		L803	1-459-224-00	HLC		R041	1-215-774-91	METAL	33K 5% 1/6W
D507	8-719-911-19	DIODE ISS119		L804	1-421-390-00	COIL, FERRITE (PMC)		R042	1-215-730-91	METAL	470 5% 1/6W
D508	8-719-911-19	DIODE ISS119		L805	1-408-239-00	MICRO INDUCTOR 4.7MMH		R043	1-215-730-91	METAL	470 5% 1/6W
D601	8-719-503-06	DIODE S3W60Z		L806	1-421-329-00	COIL, CHOKE		R044	1-215-738-91	METAL	1K 5% 1/6W
D602	8-719-901-93	DIODE V19E		L807	1-408-225-00	MICRO INDUCTOR 3.3UH		R045	1-215-738-91	METAL	1K 5% 1/6W
D603	8-719-911-19	DIODE ISS119		L808	1-407-365-00	COIL, CHOKE		R046	1-215-754-91	METAL	4.7K 5% 1/6W
D651	8-719-928-08	DIODE ERD28-08		L809	1-437-090-00	HDT		R047	1-215-714-91	METAL	100 5% 1/6W
D652	8-719-901-93	DIODE V19E		L810	1-408-240-00	MICRO INDUCTOR 6.8MMH		R048	1-215-778-91	METAL	47K 5% 1/6W
D653	8-719-901-93	DIODE V19E		L811	1-407-365-00	COIL, CHOKE		R049	1-215-770-91	METAL	22K 5% 1/6W
D654	8-719-300-59	DIODE CTU12S		L891	1-459-443-00	COIL, FERRITE		R050	1-215-738-91	METAL	1K 5% 1/6W
D655	8-719-901-93	DIODE V19E						R051	1-215-738-91	METAL	1K 5% 1/6W
D656	8-719-982-04	DIODE ERB81-004						R052	1-215-738-91	METAL	1K 5% 1/6W
D657	8-719-102-68	DIODE RD5.1E-N2						R053	1-215-790-91	METAL	150K 5% 1/6W
D659	8-719-911-19	DIODE ISS119						R055	1-215-754-91	METAL	4.7K 5% 1/6W
D661	8-719-102-78	DIODE RD6.8E-N2						R056	1-215-766-91	METAL	15K 5% 1/6W
								R057	1-215-762-91	METAL	10K 5% 1/6W

D

D

Ref.No. Part No. Description Remark					Ref.No. Part No. Description Remark					Ref.No. Part No. Description Remark													
C208	1-123-380-00	ELECT	1MF	20%	50V	C301	1-102-944-00	CERAMIC	7PF	1PF	50V	C513	1-123-356-00	ELECT	10MF	20%	50V	C672	1-102-106-00	CERAMIC	100PF	10%	50V
C209	1-102-114-00	CERAMIC	470PF	10%	50V	C302	1-102-944-00	CERAMIC	7PF	1PF	50V	C514	1-136-173-00	FILM	0.47MF	5%	50V	C801	1-102-038-00	CERAMIC	0.001MF		500V
C210	1-102-074-00	CERAMIC	0.001MF	10%	50V	C304	1-101-006-00	CERAMIC	0.047MF		50V	C515	1-123-337-00	ELECT	1000MF	20%	25V	C802	1-106-359-00	MYLAR	0.0047MF	10%	200V
C211	1-123-380-00	ELECT	1MF	20%	50V	C305	1-101-006-00	CERAMIC	0.047MF		50V	C516	1-108-620-91	MYLAR	0.0033MF	10%	100V	C803	1-102-327-11	CERAMIC	330PF	15%	1.5KV
C212	1-102-114-00	CERAMIC	470PF	10%	50V	C307	1-102-971-00	CERAMIC	82PF	5%	50V	C517	1-131-371-00	TANTALUM	10MF	20%	16V	C804	1-161-754-11	CERAMIC	0.001MF	10%	3KV
C213	1-102-074-00	CERAMIC	0.001MF	10%	50V	C308	1-123-356-00	ELECT	10MF	20%	16V	C518	1-110-175-81	MYLAR	0.1MF	10%	100V	C805	1-110-192-81	MYLAR	0.015MF	10%	400V
C214	1-123-309-00	ELECT	330MF	20%	10V	C309	1-102-113-00	CERAMIC	390PF	10%	50V	C519	1-108-614-91	MYLAR	0.001MF	10%	100V	C806	1-129-722-00	FILM	0.047MF	10%	630V
C215	1-123-332-00	ELECT	47MF	20%	16V	C310	1-101-004-00	CERAMIC	0.01MF		50V	C520	1-123-333-00	ELECT	100MF	20%	25V	C807	1-136-186-00	FILM	2.4MF	5%	200V
C216	1-110-184-81	MYLAR	0.033MF	10%	250V	C311	1-123-323-00	ELECT	470MF	20%	16V	C521	1-110-190-81	MYLAR	0.01MF	10%	400V	C808	1-136-116-00	FILM	1MF	5%	200V
C217	1-123-356-00	ELECT	10MF	20%	16V	C312	1-123-286-00	ELECT	0.33MF	20%	50V	C523	1-123-381-00	ELECT	2.2MF	20%	50V	C810	1-110-190-81	MYLAR	0.01MF	10%	400V
C218	1-123-332-00	ELECT	47MF	20%	16V	C313	1-123-356-00	ELECT	10MF	20%	16V	C523A	1-123-381-00	ELECT	2.2MF	20%	50V	C811	1-123-379-00	ELECT	0.47MF	20%	50V
C219	1-123-380-00	ELECT	1MF	20%	50V	C314	1-123-381-00	ELECT	2.2MF	20%	50V	C525	1-123-330-00	ELECT	22MF	20%	16V	C812	1-102-223-00	CERAMIC	0.0047MF	10%	2KV
C220	1-123-380-00	ELECT	1MF	20%	50V	C315	1-123-381-00	ELECT	2.2MF	20%	50V	C526	1-123-349-00	ELECT	1000MF	20%	35V	C813	1-110-175-81	MYLAR	0.1MF	10%	100V
C221	1-102-108-00	CERAMIC	150PF	10%	50V	C317	1-110-182-81	MYLAR	0.022MF	10%	250V	C527	1-110-186-81	MYLAR	0.0047MF	10%	400V	C814	1-123-005-00	ELECT	22MF		250V
C222	1-101-004-00	CERAMIC	0.01MF		50V	C318	1-131-345-00	TANTALUM	0.47MF	20%	35V	C529	1-123-318-00	ELECT	33MF	20%	16V	C815	1-123-348-00	ELECT	470MF	20%	35V
C223	1-123-333-00	ELECT	100MF	20%	16V	C319	1-123-356-00	ELECT	10MF	20%	16V	C530	1-108-794-91	MYLAR	0.0015MF	5%	50V	C816	1-102-030-00	CERAMIC	330PF	10%	500V
C224	1-110-184-81	MYLAR	0.033MF	10%	250V	C320	1-123-380-00	ELECT	1MF	20%	50V	C531	1-123-356-00	ELECT	10MF	20%	16V	C818	1-130-894-00	FILM	0.022MF	3%	1.2KV
C249	1-123-379-00	ELECT	0.47MF	20%	50V	C321	1-131-345-00	TANTALUM	0.47MF	20%	35V	C532	1-123-332-00	ELECT	47MF	20%	16V	C819	1-130-061-00	FILM	0.0015MF	10%	630V
C250	1-102-108-00	CERAMIC	150PF	10%	50V	C322	1-131-345-00	TANTALUM	0.47MF	20%	35V	C533	1-123-306-00	ELECT	47MF	20%	10V	C824	1-110-182-81	MYLAR	0.022MF	10%	250V
C251	1-123-379-00	ELECT	0.47MF	20%	50V	C323	1-102-110-00	CERAMIC	220PF	10%	50V	C534	1-123-332-00	ELECT	47MF	20%	16V	C825	1-136-184-00	MYLAR	0.68MF	10%	250V
C252	1-123-380-00	ELECT	1MF	20%	50V	C324	1-102-110-00	CERAMIC	220PF	10%	50V	C536	1-123-356-00	ELECT	10MF	20%	50V	C827	1-102-038-00	CERAMIC	0.001MF		500V
C253	1-123-380-00	ELECT	1MF	20%	50V	C325	1-136-173-00	FILM	0.47MF	5%	50V	C591	1-136-173-00	FILM	0.47MF	5%	50V	C828	1-102-114-00	CERAMIC	470PF	10%	50V
C254	1-123-380-00	ELECT	1MF	20%	50V	C326	1-136-173-00	FILM	0.47MF	5%	50V	C596	1-110-188-81	MYLAR	0.0068MF	10%	400V						
C255	1-123-380-00	ELECT	1MF	20%	50V	C327	1-121-705-00	ELECT	2.2MF	30%	25V	C597	1-102-980-00	CERAMIC	270PF	5%	50V						
C256	1-110-186-81	MYLAR	0.0047MF	10%	400V	C328	1-102-973-00	CERAMIC	100PF	5%	50V	C602	1-117-119-51	PAPER	0.1MF	20%	250V						
C257	1-110-176-81	MYLAR	0.12MF	10%	100V	C329	1-101-004-00	CERAMIC	0.01MF		50V	C605	1-161-738-12	CERAMIC	0.0047MF	20%	400V						
C258	1-110-186-81	MYLAR	0.0047MF	10%	400V	C331	1-102-129-00	CERAMIC	0.01MF	10%	50V	C606	1-161-738-12	CERAMIC	0.0047MF	20%	400V						
C259	1-110-176-81	MYLAR	0.12MF	10%	100V	C332	1-102-973-00	CERAMIC	100PF	5%	50V	C607	1-161-964-61	CERAMIC	0.0047MF	250V							
C260	1-123-323-00	ELECT	470MF	20%	16V	C333	1-123-356-00	ELECT	10MF	20%	16V	C608	1-161-964-61	CERAMIC	0.0047MF	250V							
C261	1-123-379-00	ELECT	0.47MF	20%	50V	C334	1-123-356-00	ELECT	10MF	20%	16V	C609	1-161-964-00	CERAMIC	0.0047MF	250V							
C262	1-110-184-81	MYLAR	0.033MF	10%	250V	C335	1-136-173-00	FILM	0.47MF	5%	50V	C610	1-125-167-00	ELECT(BLOCK)	250MF		400V						
C263	1-102-114-00	CERAMIC	470PF	10%	50V	C336	1-102-858-00	CERAMIC	10PF	0.5PF	50V	C611	1-110-182-81	MYLAR	0.022MF	10%	250V						
C264	1-123-330-00	ELECT	22MF	20%	16V	C337	1-102-888-00	CERAMIC	150PF	5%	50V	C612	1-136-064-00	FILM	0.002MF	3%	2KV						
C265	1-123-379-00	ELECT	0.47MF	20%	50V	C337A	1-102-676-00	CERAMIC	68PF	5%	50V	C613	1-123-381-00	ELECT	2.2MF	20%	100V						
C266	1-102-108-00	CERAMIC	150PF	10%	50V	C338	1-102-884-00	CERAMIC	33PF	5%	50V	C615	1-123-382-00	ELECT	3.3MF	20%	50V						
C267	1-123-379-00	ELECT	0.47MF	20%	50V	C339	1-102-959-00	CERAMIC	22PF	5%	50V	C616	1-102-121-00	CERAMIC	0.0022MF	10%	50V						
C268	1-102-114-00	CERAMIC	470PF	10%	50V	C340	1-102-945-00	CERAMIC	8PF	1PF	50V	C617	1-123-382-00	ELECT	3.3MF	20%	50V						
C269	1-123-379-00	ELECT	0.47MF	20%	50V	C341	1-102-947-00	CERAMIC	10PF	5%	50V	C618	1-106-343-00	MYLAR	0.001MF	10%	200V						
C270	1-123-330-00	ELECT	22MF	20%	16V	C343	1-102-973-00	CERAMIC	100PF	5%	50V	C619	1-123-006-00	ELECT	3.3MF	350V							
C271	1-123-379-00	ELECT	0.47MF	20%	50V	C344	1-123-379-00	ELECT	0.47MF	20%	50V	C651	1-102-155-00	CERAMIC	330PF	20%	2KV						
C272	1-110-175-81	MYLAR	0.1MF	10%	100V	C345	1-110-177-81	MYLAR	0.15MF	10%	100V	C652	1-124-347-00	ELECT	100MF	20%	160V						
C273	1-123-359-00	ELECT	47MF	20%	50V	C346	1-123-333-00	ELECT	100MF	20%	16V	C653	1-124-512-51	ELECT	33MF	20%	50V						
C274	1-123-364-00	ELECT	1000MF	20%	50V	C347	1-110-186-81	MYLAR	0.0047MF	10%	400V	C654	1-123-364-00	ELECT	1000MF	20%	50V						
C276	1-123-359-00	ELECT	47MF	20%	50V	C503	1-110-190-81	MYLAR	0.01MF	10%	400V	C656	1-123-606-00	ELECT	1000MF	20%	25V						
C277	1-110-175-81	MYLAR	0.1MF	10%	100V	C504	1-130-019-00	FILM	0.0012MF	5%	50V	C657	1-123-311-00	ELECT	1000MF	20%	10V						
C278	1-123-364-00	ELECT	1000MF	20%	50V	C505	1-110-175-81	MYLAR	0.1MF	10%	100V	C659	1-123-382-00	ELECT	3.3MF	20%	50V						
C279	1-123-331-89	ELECT	33MF	20%	25V	C506	1-123-308-00	ELECT	220MF	20%	6.3V	C660	1-123-380-00	ELECT	1MF	20%	50V						
C280	1-123-364-00	ELECT	1000MF	20%	50V	C507	1-123-321-00	ELECT	220MF	20%	16V	C661	1-110-187-81	MYLAR	0.0056MF	10%	400V						
C281	1-123-360-00	ELECT	100MF	20%	50V	C508	1-1																

D

Ref.No.	Part No.	Description	Remark
R058	1-215-786-91	METAL	100K 5% 1/6W
R059	1-215-762-91	METAL	10K 5% 1/6W
R060	1-215-726-91	METAL	330 5% 1/6W
R080	1-215-754-91	METAL	4.7K 5% 1/6W
R081	1-215-766-91	METAL	15K 5% 1/6W
R201	1-215-776-91	METAL	39K 5% 1/6W
R203	1-215-711-91	METAL	75 5% 1/6W
R207	1-215-774-91	METAL	33K 5% 1/6W
R208	1-215-770-91	METAL	22K 5% 1/6W
R209	1-215-168-00	METAL	4.7K 5% 1/4W
R210	1-215-168-00	METAL	4.7K 5% 1/4W
R211	1-215-738-91	METAL	8.2K 5% 1/6W
R212	1-215-728-91	METAL	390 5% 1/6W
R213	1-215-690-91	METAL	10 5% 1/6W
R214	1-215-718-91	METAL	150 5% 1/6W
R215	1-215-738-91	METAL	1K 5% 1/6W
R216	1-215-738-91	METAL	1K 5% 1/6W
R217	1-215-762-91	METAL	10K 5% 1/6W
R218	1-215-711-91	METAL	75 5% 1/6W
R219	1-247-031-00	CARBON	27 5% 1/8W F
R220	1-215-738-91	METAL	1K 5% 1/6W
R221	1-215-738-91	METAL	1K 5% 1/6W
R224	1-215-730-91	METAL	470 5% 1/6W
R225	1-215-714-91	METAL	100 5% 1/6W
R226	1-215-714-91	METAL	100 5% 1/6W
R227	1-215-714-91	METAL	100 5% 1/6W
R228	1-215-714-91	METAL	100 5% 1/6W
R229	1-215-714-91	METAL	100 5% 1/6W
R230	1-215-176-00	METAL	10K 5% 1/4W
R231	1-215-738-91	METAL	1K 5% 1/6W
R232	1-215-786-91	METAL	100K 5% 1/6W
R234	1-215-738-91	METAL	1K 5% 1/6W
R235	1-215-754-91	METAL	4.7K 5% 1/6W
R236	1-215-784-91	METAL	82K 5% 1/6W
R237	1-215-810-91	METAL	1M 5% 1/6W
R238	1-215-762-91	METAL	10K 5% 1/6W
R239	1-215-778-91	METAL	47K 5% 1/6W
R240	1-215-794-91	METAL	220K 5% 1/6W
R241	1-215-794-91	METAL	220K 5% 1/6W
R242	1-215-734-91	METAL	680 5% 1/6W
R243	1-215-786-91	METAL	100K 5% 1/6W
R244	1-215-786-91	METAL	100K 5% 1/6W
R245	1-215-738-91	METAL	1K 5% 1/6W
R246	1-215-738-91	METAL	1K 5% 1/6W
R252	1-215-762-91	METAL	10K 5% 1/6W
R253	1-215-762-91	METAL	10K 5% 1/6W
R254	1-215-774-91	METAL	33K 5% 1/6W
R257	1-215-738-91	METAL	1K 5% 1/6W
R258	1-215-738-91	METAL	1K 5% 1/6W
R259	1-215-762-91	METAL	10K 5% 1/6W
R260	1-215-782-91	METAL	68K 5% 1/6W
R261	1-215-750-91	METAL	3.3K 5% 1/6W
R262	1-217-393-00	FUSIBLE	33 5% 1/4W F

Ref.No.	Part No.	Description	Remark
R263	1-215-776-91	METAL	39K 5% 1/6W
R264	1-215-781-91	METAL	62K 5% 1/6W
R265	1-215-752-91	METAL	3.9K 5% 1/6W
R266	1-215-762-91	METAL	10K 5% 1/6W
R267	1-215-810-91	METAL	1M 5% 1/6W
R268	1-215-738-91	METAL	1K 5% 1/6W
R269	1-215-770-91	METAL	22K 5% 1/6W
R270	1-215-150-00	METAL	820 5% 1/4W
R271	1-215-788-91	METAL	120K 5% 1/6W
R273	1-215-782-91	METAL	68K 5% 1/6W
R274	1-215-754-91	METAL	4.7K 5% 1/6W
R275	1-215-762-91	METAL	10K 5% 1/6W
R276	1-215-150-00	METAL	820 5% 1/4W
R277	1-215-762-91	METAL	10K 5% 1/6W
R280	1-215-786-91	METAL	100K 5% 1/6W
R281	1-215-756-91	METAL	5.6K 5% 1/6W
R282	1-215-754-91	METAL	4.7K 5% 1/6W
R284	1-247-005-00	CARBON	100 5% 1/4W F
R285	1-215-754-91	METAL	4.7K 5% 1/6W
R286	1-215-756-91	METAL	5.6K 5% 1/6W
R287	1-215-786-91	METAL	100K 5% 1/6W
R288	1-215-788-91	METAL	120K 5% 1/6W
R289	1-215-778-91	METAL	47K 5% 1/6W
R297	1-215-738-91	METAL	1K 5% 1/6W
R298	1-215-738-91	METAL	1K 5% 1/6W
R301	1-215-742-91	METAL	1.5K 5% 1/6W
R302	1-215-742-91	METAL	1.5K 5% 1/6W
R303	1-215-723-91	METAL	240 5% 1/6W
R304	1-215-743-91	METAL	1.8K 5% 1/6W
R305	1-215-738-91	METAL	1K 5% 1/6W
R306	1-215-738-91	METAL	1K 5% 1/6W
R307	1-215-738-91	METAL	1K 5% 1/6W
R308	1-215-726-91	METAL	330 5% 1/6W
R309	1-215-744-91	METAL	1.8K 5% 1/6W
R310	1-215-760-91	METAL	8.2K 5% 1/6W
R313	1-215-722-91	METAL	220 5% 1/6W
R314	1-215-738-91	METAL	1K 5% 1/6W
R315	1-215-748-91	METAL	2.7K 5% 1/6W
R316	1-215-748-91	METAL	2.7K 5% 1/6W
R317	1-215-772-91	METAL	27K 5% 1/6W
R318	1-215-720-91	METAL	180 5% 1/6W
R319	1-215-738-91	METAL	1K 5% 1/6W
R320	1-215-788-91	METAL	120K 5% 1/6W
R322	1-215-762-91	METAL	10K 5% 1/6W
R323	1-215-744-91	METAL	1.8K 5% 1/6W
R324	1-215-732-91	METAL	560 5% 1/6W
R325	1-215-728-91	METAL	390 5% 1/6W
R326	1-215-784-91	METAL	82K 5% 1/6W
R327	1-215-738-91	METAL	1K 5% 1/6W
R331	1-215-784-91	METAL	82K 5% 1/6W
R332	1-215-732-91	METAL	560 5% 1/6W
R333	1-215-760-91	METAL	8.2K 5% 1/6W
R334	1-215-747-91	METAL	2.4K 5% 1/6W

D

Ref.No.	Part No.	Description	Remark
R335	1-215-766-91	METAL	15K 5% 1/6W
R336	1-215-762-91	METAL	10K 5% 1/6W
R337	1-215-762-91	METAL	10K 5% 1/6W
R338	1-215-738-91	METAL	1K 5% 1/6W
R339	1-215-738-91	METAL	1K 5% 1/6W
R340	1-215-728-91	METAL	390 5% 1/6W
R341	1-215-728-91	METAL	390 5% 1/6W
R343	1-215-786-91	METAL	100K 5% 1/6W
R344	1-215-770-91	METAL	22K 5% 1/6W
R345	1-215-789-91	METAL	130K 5% 1/6W
R346	1-215-722-91	METAL	220 5% 1/6W
R347	1-215-732-91	METAL	560 5% 1/6W
R348	1-215-734-91	METAL	680 5% 1/6W
R349	1-215-756-91	METAL	5.6K 5% 1/6W
R350	1-215-760-91	METAL	8.2K 5% 1/6W
R351	1-215-770-91	METAL	22K 5% 1/6W
R352	1-215-744-91	METAL	1.8K 5% 1/6W
R353	1-215-750-91	METAL	3.3K 5% 1/6W
R354	1-215-790-91	METAL	150K 5% 1/6W
R356	1-215-764-91	METAL	12K 5% 1/6W
R357	1-215-752-91	METAL	3.9K 5% 1/6W
R358	1-215-768-91	METAL	18K 5% 1/6W
R359	1-215-766-91	METAL	15K 5% 1/6W
R360	1-215-782-91	METAL	68K 5% 1/6W
R361	1-215-734-91	METAL	680 5% 1/6W
R362	1-215-160-00	METAL	2.2K 5% 1/4W
R364	1-215-746-91	METAL	2.2K 5% 1/6W
R365	1-215-764-91	METAL	12K 5% 1/6W
R366	1-215-746-91	METAL	2.2K 5% 1/6W
R367	1-215-722-91	METAL	220 5% 1/6W
R368	1-215-722-91	METAL	220 5% 1/6W
R369	1-215-722-91	METAL	220 5% 1/6W
R370	1-215-730-91	METAL	470 5% 1/6W
R371	1-215-714-91	METAL	100 5% 1/6W
R372	1-215-740-91	METAL	1.2K 5% 1/6W
R373	1-215-738-91	METAL	1K 5% 1/6W
R374	1-215-804-91	METAL	560K 5% 1/6W
R376	1-215-186-00	METAL	27K 5% 1/4W
R377	1-215-186-00	METAL	27K 5% 1/4W
R378	1-215-768-91	METAL	18K 5% 1/6W
R379	1-215-771-91	METAL	24K 5% 1/6W
R380	1-215-784-91	METAL	82K 5% 1/6W
R381	1-215-738-91	METAL	1K 5% 1/6W
R501	1-215-738-91	METAL	1K 5% 1/6W
R502	1-215-160-00	METAL	2.2K 5% 1/4W
R504	1-215-760-91	METAL	8.2K 5% 1/6W
R505	1-215-746-91	METAL	2.2K 5% 1/6W
R507	1-214-765-00	METAL	33K 1% 1/4W
R507A	1-215-802-91	METAL	470K 5% 1/6W
R508	1-215-776-91	METAL	39K 5% 1/6W
R509	1-215-738-91	METAL	1K 5% 1/6W
R510	1-215-736-91	METAL	820 5% 1/6W
R511	1-215-758-91	METAL	6.8K 5% 1/6W

Ref.No.	Part No.	Description	Remark
R512	1-215-712-91	METAL	82 5% 1/6W
R513	1-215-779-91	METAL	51K 5% 1/6W
R515	1-215-795-91	METAL	240K 5% 1/6W
R516	1-212-361-00	METAL OXI DE	1.2 5% 1W F
R517	1-215-760-91	METAL	8.2K 5% 1/6W
R518	1-215-758-91	METAL	6.8K 5% 1/6W
R519	1-215-764-91	METAL	12K 5% 1/6W
R520	1-215-762-91	METAL	10K 5% 1/6W
R521	1-212-891-00	FUSIBLE	270 5% 1/4W F
R522	1-244-851-51	CARBON	120 5% 1/2W
R523	1-215-732-91	METAL	560 5% 1/6W
R525	1-215-748-91	METAL	2.7K 5% 1/6W
R526	1-215-802-91	METAL	470K 5% 1/6W
R527	1-215-752-91	METAL	3.9K 5% 1/6W
R530	1-215-748-91	METAL	2.7K 5% 1/6W
R531	1-215-728-91	METAL	390 5% 1/6W
R532	1-215-740-91	METAL	1.2K 5% 1/6W
R533	1-215-794-91	METAL	220K 5% 1/6W
R535	1-215-738-91	METAL	1K 5% 1/6W
R536	1-215-749-91	METAL	3K 5% 1/6W
R537	1-215-726-91	METAL	330 5% 1/6W
R538	1-213-140-00	METAL OXI DE	560 5% 1W F
R539	1-215-776-91	METAL	390K 5% 1/6W
R582	1-215-786-91	METAL	100K 5% 1/6W
R591	1-215-746-91	METAL	2.7K 5% 1/6W
R592	1-215-148-00	METAL	680 5% 1/4W
R596	1-215-800-91	METAL	390K 5% 1/6W
R597	1-215-740-91	METAL	1.2K 5% 1/6W
R598	1-215-758-91	METAL	6.8K 5% 1/6W
R604	1-205-737-00	CEMENTED	30 10% 7W
R605	1-205-728-00	CEMENTED	47 10% 7W
R606	1-215-698-91	METAL	22 5% 1/6W
R608	1-206-660-00	METAL OXI DE	680 5% 2W F
R609	1-215-730-91	METAL	470 5% 1/6W
R610	1-215-770-91	METAL	22K 5% 1/6W
R612	1-215-099-81	METAL	6.2 5% 1/4W
R613	1-215-802-91	METAL	470K 5% 1/6W
R616	1-215-140-00	METAL	330 5% 1/4W
R618	1-247-855-00	CARBON	10K 5% 1/8W
R651	1-212-936-00	FUSIBLE	1.2 5% 1/2W F
R652	1-217-653-00	FUSIBLE	0.47 10% 2W
R653	1-217-653-00	FUSIBLE	0.47 10% 2W
R654	1-217-418-00	FUSIBLE	0.47 10% 1/2W F
R655	1-214-777-00	METAL	100K 1% 1/4W
R656	1-215-746-91	METAL	2.2K 5% 1/6W
R657	1-215-770-91	METAL	22K 5% 1/6W
R658	1-215-734-91	METAL	680 5% 1/6W
R659	1-215-754-91	METAL	4.7K 5% 1/6W
R660	1-215-733-91	METAL	620 5% 1/6W
R661	1-215-750-91	METAL	3.3K 5% 1/6W
R662	1-215-786-91	METAL	100K 5% 1/6W
R663	1-215-802-91	METAL	470K 5% 1/6W
R664	1-215-776-91	METAL	39K 5% 1/6W

D S2 S H2

J2 J1 H1 N

Ref.No.	Part No.	Description	Remark
R665	1-215-772-91	METAL 27K 5% 1/6W	
R666	1-215-762-91	METAL 10K 5% 1/6W	
R667	1-215-766-91	METAL 15K 5% 1/6W	
R669	1-215-204-00	METAL 150K 5% 1/4W	
R670	1-215-762-91	METAL 10K 5% 1/6W	
R671	1-215-750-91	METAL 3.3K 5% 1/6W	
R672	1-247-837-00	CARBON 1.8K 5% 1/8W F	
R674	1-213-149-00	METAL OXIDE 3.3 5% 1W F	
R675	1-214-749-00	METAL 6.8K 1% 1/4W	
R676	1-214-753-00	METAL 10K 1% 1/4W	
R801	1-215-714-91	METAL 100 5% 1/6W	
R802	1-247-236-00	CARBON 680 5% 1/2W	
R803	1-215-710-91	METAL 68 5% 1/6W	
R804	1-213-147-00	METAL OXIDE 2.2K 5% 1W F	
R805	1-213-146-00	METAL OXIDE 1.8K 5% 1W F	
R806	1-202-838-00	SOLID 100K 1/2W	
R807	1-202-818-00	SOLID 1K 1/2W	
R808	1-202-826-00	SOLID 4.7K 1/2W	
R809	1-244-924-00	CARBON 130K 5% 1/2W	
R810	1-210-859-00	CARBON 1.2 5% 1/8W F	
R811	1-217-418-00	FUSIBLE 0.47 10% 1/2W F	
R812	1-215-770-91	METAL 22K 5% 1/6W	
R815	1-206-658-00	METAL OXIDE 560 5% 2W F	
R817	1-206-459-00	METAL OXIDE 6.8 5% 2W F	
R818	1-247-791-00	CARBON 22 5% 1/8W F	
R820	1-217-220-00	WIREWOUND 47 10% 2W F	
R821	1-210-825-00	SOLID 3.3M 5% 1/4W	
R824	1-207-616-00	WIREWOUND 0.47 10% 2W F	
R825	1-213-144-00	METAL OXIDE 1.2K 5% 1W F	
R826	1-215-762-91	METAL 10K 5% 1/6W	
R827	1-217-399-00	FUSIBLE 100 5% 1/4W F	
VARIABLE RESISTOR			
RV251	1-228-727-00	RES, ADJ, CERAMIC CARBON 47K	
RV301	1-228-720-00	RES, ADJ, CERAMIC CARBON 1K	
RV302	1-228-724-00	RES, ADJ, CERAMIC CARBON 10K	
RV303	1-228-725-00	RES, ADJ, CERAMIC CARBON 22K	
RV501	1-228-723-00	RES, ADJ, CERAMIC CARBON 4.7K	
RV502	1-228-728-00	RES, ADJ, CERAMIC CARBON 100K	
RV651	1-228-720-00	RES, ADJ, CERAMIC CARBON 1K	
SPARK GAP			
SG801	1-519-063-XX	DISCHARGING GAP	
TRANSFORMER			
T301	1-404-524-21	DAT	
T602	1-421-412-11	COIL, FERRITE	
T604	1-437-147-11	TRANSFORMER, FERRITE	
T605	1-437-079-00	TRANSFORMER, HORIZONTAL DRIVE	
T606	1-421-652-11	TRANSFORMER, FERRITE (SRT)	
T607	1-421-624-12	TRANSFORMER, CURRENT	

Ref.No.	Part No.	Description	Remark
T801	1-437-149-11	TRANSFORMER, HORIZONTAL DRIVE	
T802	1-439-332-21	TRANSFORMER ASSY, FLYBACK	
T891	1-421-634-00	TRANSFORMER, FERRITE (V.PCT)	
CRYSTAL			
X301	1-567-131-00	OSCILLATOR, CRYSTAL	

*1-610-433-00	S2 BOARD	*****	
DIODE			
D481	8-719-961-03	DIODE RGP10G	
RELAY			
RL901	1-515-511-11	RELAY, HIGH FREQUENCY	

*1-611-172-00	S BOARD	*****	
CAPACITOR			
C01	1-123-332-00	ELECT 47MF 20% 16V	
TRANSISTOR			
Q01	8-729-245-83	TRANSISTOR 2SC2458	
Q02	8-729-204-83	TRANSISTOR 2SA1048GR	
RESISTOR			
R01	1-215-766-91	METAL 15K 5% 1/6W	
R02	1-215-762-91	METAL 10K 5% 1/6W	
R03	1-215-754-91	METAL 4.7K 5% 1/6W	

*1-611-187-21	H2 BOARD	*****	
*4-362-295-00	HOLDER (C), LED		
*4-366-807-00	COVER (C), LED HOLDER		
DIODE			
LED404	8-719-901-96	DIODE SLP1618	
LED405	8-719-901-96	DIODE SLP1618	
LED406	8-719-901-96	DIODE SLP1618	

Ref.No.	Part No.	Description	Remark
*1-611-171-00	J2 BOARD	*****	
CONNECTOR			
J2	*1-508-766-00	4P PLUG (M)	

*1-611-170-00	J1 BOARD	*****	
JACK			
CN901	1-507-657-00	JACK	
RESISTOR			
R901	1-215-144-00	METAL 470 5% 1/4W	
R902	1-215-144-00	METAL 470 5% 1/4W	

*1-611-002-00	H1 BOARD	*****	
*1-526-634-00	SOCKET, IC (8P)		
*4-357-812-00	HOLDER, LED		
*4-362-207-00	HOLDER (P), LED		
*4-362-219-00	COVER (W), LED HOLDER		
CAPACITOR			
C401	1-123-356-00	ELECT 10MF 20% 16V	
C402	1-123-356-00	ELECT 10MF 20% 16V	
DIODE			
D401	8-719-911-19	DIODE 1SS119	
D402	8-719-911-19	DIODE 1SS119	
D403	8-719-911-19	DIODE 1SS119	
D404	8-719-911-19	DIODE 1SS119	
D405	8-719-911-19	DIODE 1SS119	
D406	8-719-911-19	DIODE 1SS119	
D407	8-719-911-19	DIODE 1SS119	
D408	8-719-911-19	DIODE 1SS119	
D409	8-719-911-19	DIODE 1SS119	
LED401	8-719-912-22	DIODE SL1222	
LED402	8-719-800-24	DIODE TLR147	
LED403	8-719-901-96	DIODE SLP1618	
RESISTOR			
R402	1-215-160-00	METAL 2.2K 5% 1/4W	
R412	1-215-134-00	METAL 180 5% 1/4W	
VARIABLE RESISTOR			
RV401	1-228-578-00	RES, VAR, CARBON 10K	
RV402	1-228-578-00	RES, VAR, CARBON 10K	
RV403	1-228-578-00	RES, VAR, CARBON 10K	

Ref.No.	Part No.	Description	Remark
RV404	1-228-578-00	RES, VAR, CARBON 10K	
RV405	1-228-578-00	RES, VAR, CARBON 10K	
SWITCH			
SW401	1-554-118-00	SWITCH, PUSH	
SW402	1-554-118-00	SWITCH, PUSH	
SW403	1-552-774-00	SWITCH, PUSH	
SW404	1-552-774-00	SWITCH, PUSH	
SW405	1-552-774-00	SWITCH, PUSH	
SW406	1-552-774-00	SWITCH, PUSH	
SW407	1-552-774-00	SWITCH, PUSH	
SW408	1-552-774-00	SWITCH, PUSH	
SW409	1-552-774-00	SWITCH, PUSH	
SW410	1-552-774-00	SWITCH, PUSH	
SW411	1-552-774-00	SWITCH, PUSH	
SW412	1-552-774-00	SWITCH, PUSH	
SW413	1-552-774-00	SWITCH, PUSH	
SW414	1-552-774-00	SWITCH, PUSH	
SW415	1-552-774-00	SWITCH, PUSH	
SW416	1-552-774-00	SWITCH, PUSH	
SW417	1-552-774-00	SWITCH, PUSH	
SW418	1-552-774-00	SWITCH, PUSH	
SW419	1-552-774-00	SWITCH, PUSH	

*1-606-794-00	N BOARD	*****	
*4-342-117-00	CASE, SHIELD (MAIN), R		
*4-342-118-00	LID, SHIELD CASE, R		
CAPACITOR			
C1	1-123-617-00	ELECT 10MF 20% 16V	
C2	1-123-617-00	ELECT 10MF 20% 16V	
C3	1-123-617-00	ELECT 10MF 20% 16V	
C4	1-161-057-00	CERAMIC 0.033MF 10% 25V	
C5	1-106-184-00	MYLAR 0.0033MF 5% 50V	
C6	1-123-821-00	ELECT 47MF 20% 16V	
DIODE			
D1	8-719-110-32	DIODE PH3028	
IC			
IC1	8-759-113-73	IC UPC1373H	
COIL			
L1	1-404-310-00	COIL	

A

A

Ref.No.	Part No.	Description	Remark
MISCELLANEOUS			

	1-161-834-00	CAP (SMALL FEED-THROUGH)1000PF	
	Δ 1-451-226-11	DEFLECTION Yoke (SY105A)	
	1-452-032-00	MAGNET, DISK; 10MM Ø	
	1-452-094-00	MAGNET, ROTATABLE DISK; 15MM Ø	
	1-452-146-21	MAGNET, BMC	
	Δ 1-452-315-11	CRT NECK ASSY (M303)	
	*1-507-900-00	JACK	
	Δ 1-536-849-11	TERMINAL BOARD ASSY, ANTENNA	
	Δ 1-551-270-31	CORD, POWER	
	Δ 1-557-117-12	SOCKET, PAL ANTENNA (WITH CABLE)	
	*1-557-261-11	CABLE, P-P	
L901	Δ 1-426-041-21	COIL, DEGAUSSING	
L902	Δ 1-426-041-21	COIL, DEGAUSSING	
RV902	Δ 1-215-066-21	RES ASSY, HIGH-VOLTAGE	
RV901	Δ 1-228-544-11	RESISTOR ASSY, HIGH-VOLTAGE	
S801	Δ 1-552-806-21	SWITCH, PUSH	
S901	Δ 1-553-225-12	SWITCH, PUSH	
SP901	1-503-270-00	SPEAKER	
V901	Δ 8-738-405-05	CRT (680DB22)	

ACCESSORIES AND PACKING MATERIALS

Part No.	Description	Remark
A-1470-625-A	COMMANDER ASSY (RM-635)	
X-4369-107-0	BAND ASSY	
4-361-988-02	BAG, PROTECTION	
4-369-125-00	CUSHION (UPPER) (ASSY)	
4-369-126-00	CUSHION (LOWER) (ASSY)	
4-369-129-00	TRAY	
4-369-157-01	INDIVIDUAL CARTON	
4-491-710-51	INSTRUCTION, TELETEXT	
4-491-792-01	SCHEMATIC DIAGRAM (B2)	
4-493-828-71	MANUAL, INSTRUCTION	

Δ A-1295-810-A A BOARD, SUB, COMPLETE (KV2752ET only)

Δ 1-463-411-00	TUNER, UHF/VHF ET (UV411)	
Δ 4-363-672-00	CASE (MAIN), SHIELD, VIF	
Δ 4-363-673-00	CASE (BOTTOM LID), SHIELD, VIF	
Δ 4-363-674-00	CASE (UPPER LID), SHIELD, VIF	

Ref.No.	Part No.	Description	Remark
CONNECTOR			
A1	Δ 1-560-124-00	PLUG, CONNECTOR (2.5MM) 4P	
A2	Δ 1-560-126-00	PLUG, CONNECTOR (2.5MM) 6P	
A3	Δ 1-560-156-00	PLUG, CONNECTOR (2.5MM PITCH)	
CAPACITOR			
C102	1-123-356-00	ELECT 10MF 20% 16V	
C103	1-123-356-00	ELECT 10MF 20% 16V	
C105	1-123-356-00	ELECT 10MF 20% 16V	
C106	1-123-318-00	ELECT 33MF 20% 16V	
C107	1-123-356-00	ELECT 10MF 20% 16V	
C108	1-108-387-00	MYLAR 0.068MF 10% 100V	
C109	1-108-387-00	MYLAR 0.068MF 10% 100V	
C110	1-102-963-00	CERAMIC 33PF 5% 50V	
C111	1-123-318-00	ELECT 33MF 20% 16V	
C112	1-102-525-00	CERAMIC 68PF 5% 50V	
C113	1-102-514-00	CERAMIC 22PF 5% 50V	
C115	1-102-523-00	CERAMIC 56PF 5% 50V	
C116	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C117	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C118	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C119	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C120	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C121	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C123	1-102-108-00	CERAMIC 150PF 10% 50V	
C124	1-130-014-00	FILM 470PF 5% 50V	
C126	1-123-318-00	ELECT 33MF 20% 16V	
C127	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C128	1-101-004-00	CERAMIC 0.01MF 50V	
C129	1-101-004-00	CERAMIC 0.01MF 50V	
C130	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C131	1-123-353-00	ELECT 2.2MF 20% 50V	
C132	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C133	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C134	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C135	1-102-525-00	CERAMIC 68PF 5% 50V	
C136	1-102-525-00	CERAMIC 68PF 5% 50V	
C137	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C138	1-123-286-00	ELECT 0.33MF 20% 50V	
C139	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C140	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C141	1-123-318-00	ELECT 33MF 20% 16V	
C142	1-102-525-00	CERAMIC 68PF 5% 50V	
C143	1-101-004-00	CERAMIC 0.01MF 50V	
C144	1-123-286-00	ELECT 0.33MF 20% 50V	
C151	1-101-004-00	CERAMIC 0.01MF 50V	
C152	1-101-004-00	CERAMIC 0.01MF 50V	
C153	1-123-356-00	ELECT 10MF 20% 16V	
C154	1-101-004-00	CERAMIC 0.01MF 50V	
C155	1-123-332-00	ELECT 47MF 20% 16V	
C156	1-123-306-00	ELECT 47MF 20% 10V	
C157	1-123-306-00	ELECT 47MF 20% 10V	
C158	1-123-379-00	ELECT 0.47MF 20% 50V	
C159	1-102-816-00	CERAMIC 120PF 5% 50V	

Ref.No.	Part No.	Description	Remark
C162	1-108-570-00	MYLAR 0.0043MF 5% 50V	
C163	1-130-626-00	FILM 0.033MF 5% 50V	
C164	1-108-371-00	MYLAR 0.0033MF 10% 100V	
C165	1-108-371-00	MYLAR 0.0033MF 10% 100V	
C167	1-108-371-00	MYLAR 0.0033MF 10% 100V	
C168	1-108-371-00	MYLAR 0.0033MF 10% 100V	
C169	1-123-356-00	ELECT 10MF 20% 16V	
C170	1-123-356-00	ELECT 10MF 20% 16V	
C171	1-123-318-00	ELECT 33MF 20% 16V	
C172	1-123-379-00	ELECT 0.47MF 20% 50V	
C173	1-123-379-00	ELECT 0.47MF 20% 50V	
C174	1-106-367-00	MYLAR 0.01MF 10% 400V	
C175	1-106-367-00	MYLAR 0.01MF 10% 400V	
C176	1-123-380-00	ELECT 1MF 20% 50V	
C177	1-123-380-00	ELECT 1MF 20% 50V	
C179	1-123-328-00	ELECT 4.7MF 20% 25V	
C180	1-108-371-00	MYLAR 0.0033MF 10% 100V	
C181	1-123-318-00	ELECT 33MF 20% 16V	
C182	1-123-307-00	ELECT 100MF 20% 10V	
C183	1-102-108-00	CERAMIC 150PF 10% 50V	
C184	1-102-973-00	CERAMIC 100PF 5% 50V	
C185	1-123-356-00	ELECT 10MF 20% 16V	
C186	1-102-121-00	CERAMIC 0.0022MF 10% 50V	
C187	1-102-529-00	CERAMIC 100PF 5% 50V	
C188	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
DISCRIMINATOR			
CD151	1-404-501-00	DISCRIMINATOR, CERAMIC	
FILTER			
CF101	1-527-840-00	FILTER, CERAMIC	
CF102	1-404-134-00	TRAP, CERAMIC (5.5MHZ)	
CF151	1-527-839-00	FILTER, CERAMIC	
DIODE			
D102	8-719-911-19	DIODE 1SS119	
D103	8-719-102-74	DIODE RM6.2E-N2	
D151	8-719-911-19	DIODE 1SS119	
D152	8-719-911-19	DIODE 1SS119	
D153	8-719-911-19	DIODE 1SS119	
D154	8-719-911-19	DIODE 1SS119	
D170	8-719-911-19	DIODE 1SS119	
D171	8-719-911-19	DIODE 1SS119	
IC			
IC101	8-759-909-08	IC TDA3541	
IC102	8-759-909-54	IC TDA2546A	
IC103	8-759-800-12	IC LA7920	
IC151	8-759-007-54	IC TDA4940	
IC152	8-759-007-55	IC TDA4944	
COIL			
L102	1-404-476-00	COIL, IF	

Ref.No.	Part No.	Description	Remark
L103	1-408-593-00	MICRO INDUCTOR 1.5UH	
L104	1-408-600-00	MICRO INDUCTOR 5.6UH	
L105	1-404-477-00	COIL, IF	
L106	1-404-493-00	COIL	
L107	1-404-493-00	COIL	
L109	1-408-603-00	MICRO INDUCTOR 10UH	
L110	1-408-600-00	MICRO INDUCTOR 5.6UH	
L111	1-404-493-00	COIL	
L113	1-408-226-00	MICRO INDUCTOR 82UH	
L152	1-404-506-00	COIL, VARIABLE	
L170	1-408-247-00	MICRO INDUCTOR 33MH	
L171	1-408-602-00	MICRO INDUCTOR 8.2UH	
TRANSISTOR			
Q101	8-729-245-83	TRANSISTOR 2SC2458	
Q102	8-765-300-00	TRANSISTOR 2SC2009	
Q103	8-729-204-83	TRANSISTOR 2SA1048-GR	
Q104	8-729-900-36	TRANSISTOR DTC124ES	
Q151	8-729-245-83	TRANSISTOR 2SC2458	
Q152	8-729-245-83	TRANSISTOR 2SC2458	
Q153	8-729-245-83	TRANSISTOR 2SC2458	
Q154	8-729-900-89	TRANSISTOR DTC144ES	
Q155	8-729-245-83	TRANSISTOR 2SC2458	
Q156	8-729-245-83	TRANSISTOR 2SC2458	
Q157	8-729-900-89	TRANSISTOR DTC144ES	
Q158	8-729-900-89	TRANSISTOR DTC144ES	
Q172	8-729-204-83	TRANSISTOR 2SA1048-GR	
Q173	8-729-245-83	TRANSISTOR 2SC2458	
Q174	8-729-245-83	TRANSISTOR 2SC2458	
Q175	8-729-245-83	TRANSISTOR 2SC2458	
Q176	8-729-900-89	TRANSISTOR DTC144ES	
RESISTOR			
R101	1-247-831-00	METAL 1K 5% 1/6W	
R102	1-247-831-00	METAL 1K 5% 1/6W	
R105	1-247-855-00	METAL 10K 5% 1/6W	
R106	1-247-843-00	METAL 3.3K 5% 1/6W	
R107	1-247-843-00	METAL 3.3K 5% 1/6W	
R108	1-247-891-00	METAL 330K 5% 1/6W	
R109	1-247-839-00	METAL 2.2K 5% 1/6W	
R110	1-247-839-00	METAL 2.2K 5% 1/6W	
R111	1-247-847-00	METAL 4.7K 5% 1/6W	
R112	1-247-827-00	METAL 680 5% 1/6W	
R113	1-247-845-00	METAL 3.9K 5% 1/6W	
R114	1-247-815-00	METAL 220 5% 1/6W	
R115	1-247-835-00	METAL 1.5K 5% 1/6W	
R116	1-247-823-00	METAL 470 5% 1/6W	
R118	1-247-815-00	METAL 220 5% 1/6W	
R119	1-247-823-00	METAL 470 5% 1/6W	
R120	1-247-871-00	METAL 47K 5% 1/6W	
R122	1-247-855-00	METAL 10K 5% 1/6W	
R125	1-247-829-00	METAL 820 5% 1/6W	
R126	1-247-829-00	METAL 820 5% 1/6W	

A

<u>Ref.No</u>	<u>Part No.</u>	<u>Description</u>	<u>Remark</u>		
R127	1-247-829-00	METAL	820	5%	1/6W
R131	1-247-871-00	METAL	47K	5%	1/6W
R132	1-247-855-00	METAL	10K	5%	1/6W
R134	1-247-875-00	METAL	68K	5%	1/6W
R135	1-247-873-00	METAL	56K	5%	1/6W
R136	1-247-863-00	METAL	22K	5%	1/6W
R137	1-247-863-00	METAL	22K	5%	1/6W
R138	1-247-823-00	METAL	470	5%	1/6W
R139	1-247-783-00	METAL	10	5%	1/6W
R151	1-247-831-00	METAL	1K	5%	1/6W
R152	1-247-869-00	METAL	39K	5%	1/6W
R153	1-247-821-00	METAL	390	5%	1/6W
R155	1-247-863-00	METAL	22K	5%	1/6W
R156	1-247-877-00	METAL	82K	5%	1/6W
R157	1-247-833-00	METAL	1.2K	5%	1/6W
R158	1-247-833-00	METAL	1.2K	5%	1/6W
R159	1-247-847-00	METAL	4.7K	5%	1/6W
R160	1-247-847-00	METAL	4.7K	5%	1/6W
R161	1-247-847-00	METAL	4.7K	5%	1/6W
R162	1-247-847-00	METAL	4.7K	5%	1/6W
R166	1-247-843-00	METAL	3.3K	5%	1/6W
R167	1-247-867-00	METAL	33K	5%	1/6W
R168	1-247-863-00	METAL	22K	5%	1/6W
R172	1-247-813-00	METAL	180	5%	1/6W
R173	1-247-871-00	METAL	47K	5%	1/6W
R174	1-247-889-00	METAL	270K	5%	1/6W
R175	1-247-865-00	METAL	27K	5%	1/6W
R176	1-247-831-00	METAL	1K	5%	1/6W
R177	1-247-855-00	METAL	10K	5%	1/6W
R178	1-247-855-00	METAL	10K	5%	1/6W
R179	1-247-855-00	METAL	10K	5%	1/6W
R180	1-247-831-00	METAL	1K	5%	1/6W
R181	1-247-833-00	METAL	1.2K	5%	1/6W
R182	1-247-839-00	METAL	2.2K	5%	1/6W
R183	1-247-831-00	METAL	1K	5%	1/6W
R184	1-247-817-00	METAL	270	5%	1/6W
R185	1-247-819-00	METAL	330	5%	1/6W
R186	1-247-861-00	METAL	18K	5%	1/6W
R193	1-247-807-00	METAL	100	5%	1/6W

VARIABLE RESISTOR

RV101	1-228-727-00	RES, ADJ, CERAMIC CARBON 47K
RV151	1-228-726-00	RES, ADJ, CERAMIC CARBON 33K

FILTER

SWF101	1-404-438-00	FILTER, SAW
--------	--------------	-------------